



焊接弯板链

Offset sidebar welded steel chains

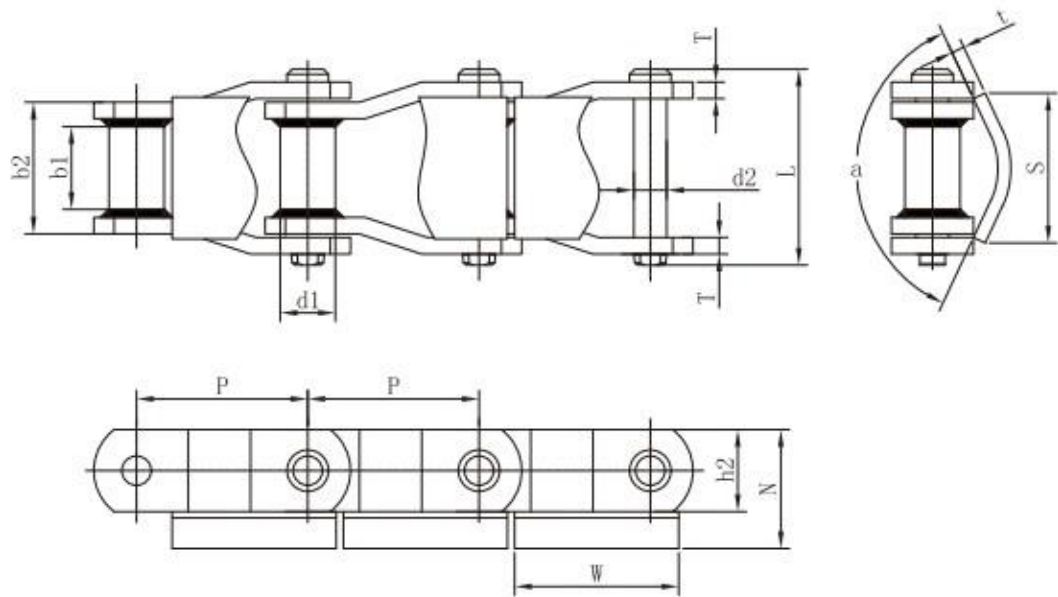


环球链号 Universal Chain No.	节距 Pitch	套筒直径 Outside barrel diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内节外宽 Width between outer plates	附件尺寸 Attachment dimension				链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Ultimate tensile strength	每米重量 Weight per meter
No.	P	d ₁ max	b ₁ min	d ₂ max	L max	b ₂ max	a	S	W	N	h ₂ max	T/t	Q min	q =
	mm	mm	mm	mm	mm	mm	/	mm	mm	mm	mm	mm	kN	kg/m
WR78U-P66.27	66.27	21.34	25.4	12.7	75	51	130°	58	63.5	46.03	31.75	6.4/5	133.5	8.73

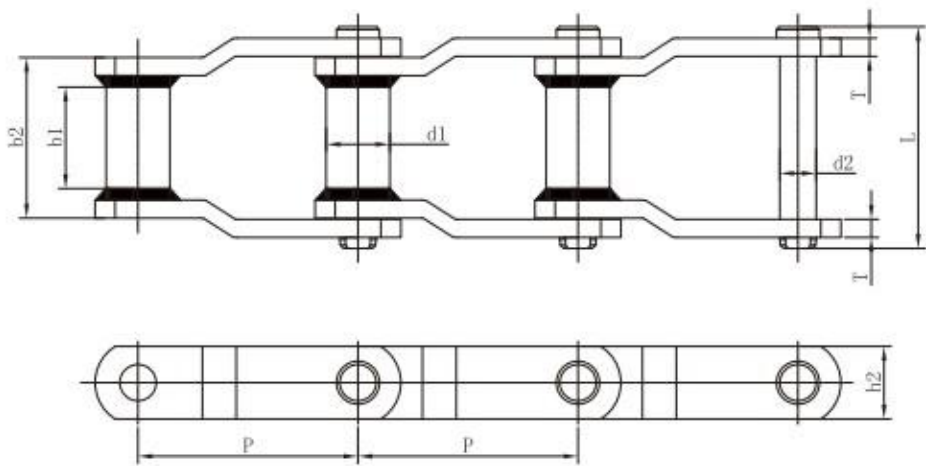

环球链号 Universal Chain No.	节距 Pitch	套筒直径 Outside barrel diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内节外宽 Width between outer plates	链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Ultimate tensile strength	每米重量 Weight per meter
No.	P	d ₁ max	b ₁ min	d ₂ max	L max	b ₂ max	h ₂ max	T	Q min	q ≈
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
WH150-P153.67	153.67	44.45	76.2	25.4	156	112	63.5	12.7	660	24.87
WR150-P153.67	153.67	44.45	76.2	25.4	156	112	63.5	12.7	542	25.05

焊接弯板链

Offset sidebar welded steel chains

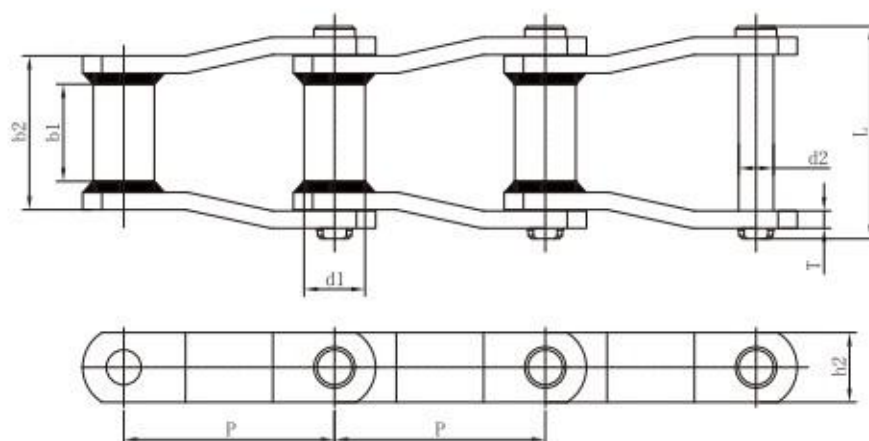

环球链号 Universal Chain No.	节距 Pitch	套筒直径 Outside barrel diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	内节外宽 Width between outer plates	链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Ultimate tensile strength	每米重量 Weight per meter
	P	d ₁ max mm	b ₁ min mm	d ₂ max mm	L max mm	b ₂ max mm	h ₂ max mm	T mm	Q min kN	q = kg/m
WH78-P66.27	66.27	21.34	25.4	12.7	75	51	31.75	6.4	147	6.44
WR78-P66.27	66.27	21.34	25.4	12.7	75	51	31.75	6.4	133.5	6.45
WR78XHD-P66.95	66.95	25.4	25.4	14.29	82	50.8	31.75	9.5	178	9.21
WH82-P78.1	78.1	25.4	28.7	14.29	82.3	57.15	31.75	6.4	160	7.24
WR82-P78.1	78.1	25.4	28.7	14.29	82.3	57.15	31.75	6.4	160	7.27
WH82XHD-P78.1	78.1	31.75	28.7	19.05	96.5	60.5	38.1	9.7	254	12.73
WR82XHD-P78.1	78.1	31.75	28.7	19.05	96.5	60.5	38.1	9.7	224.3	12.76
WH124-P101.6	101.6	31.75	38.1	19.05	107	69.9	38.1	9.7	255	11.91
WH124IBR-P101.6	101.6	31.75	38.1	19.05	107	69.85	38.1	9.7	255	11.91
WR124-P101.6	101.6	31.75	38.1	19.05	107	69.9	38.1	9.7	224.3	11.91
WH124XHD-P103.2	103.2	44.45	38.1	25.4	119.5	76.2	50.8	12.7	542	22.13
WR124XHD-P103.2	103.2	44.45	38.1	25.4	119.5	76.2	50.8	12.7	380.5	22.16
WH111-P120.9	120.9	31.75	57.15	19.05	119.2	86.2	44.45	9.7	268	13.68
WH110-P152.4	152.4	31.75	47.62	19.05	113.35	76.2	38.1	9.7	250	10.12
WH106-P152.4	152.4	31.75	38.1	19.05	107	69.85	38.1	9.7	268	9.87
WR106-P152.4	152.4	31.75	38.1	19.05	107	69.85	38.1	9.7	224.3	9.85
WH132-P153.67	153.67	44.45	69.85	25.4	156	112.3	50.8	12.7	542	21.19
WR132-P153.67	153.67	44.45	69.85	25.4	156	112.3	50.8	12.7	380.5	21.25
WH132XHD-P153.67	153.67	44.45	69.85	25.4	168.86	118.6	50.8	15.88	543	24.73
WR132XHD-P153.67	153.67	44.45	69.85	25.4	168.86	118.6	50.8	15.88	472	24.86
WH132IBR-P153.67	153.67	44.45	69.85	25.4	156	112	50.8	12.7	542	21.18