


A系列短节距精密滚子链

Short pitch precision roller chains (A series)

单排
Simplex chains

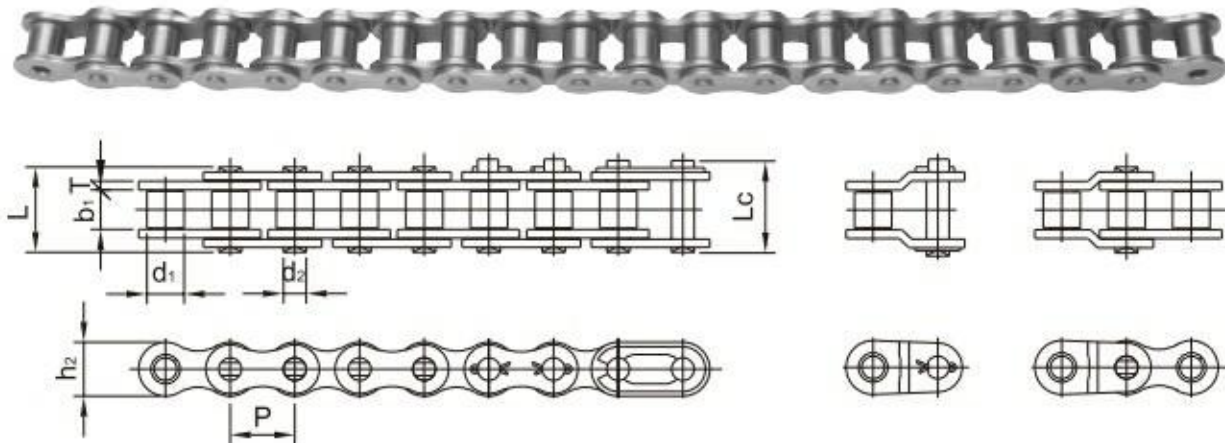


环球 链号 Universal Chain No.	ISO/DIN 链号 ISO/DIN Chain No.	节距 Pitch	内节内宽				销轴长度		内链板高度 Inner plate depth	排距 Transverse Pitch	链板厚度 Plate hickness	抗拉强度 Ultimate tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter	
			滚子直径 Roller diameter	Width between inner plates	销轴直径 Pin diameter										
			P	d ₁ max	b ₁ min	d ₂ max	L max	Lc max							
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
*04C-1	*25	6.35	3.30	3.10	2.31	8.00	9.90	6.02	-	0.80	3.50	4.40	0.14		
*06C-1	*35	9.525	5.08	4.68	3.58	12.40	14.40	8.70	-	1.30	7.90	10.40	0.33		
085-1	41	12.70	7.77	6.25	3.58	13.75	16.00	9.91	-	1.25	6.70/6.80	11.80	0.41		
08A-1	40	12.70	7.95	7.85	3.96	16.60	19.10	12.07	-	1.50	13.80/14.10	17.80	0.62		
10A-1	50	15.875	10.16	9.40	5.08	20.70	23.30	15.09	-	2.06	21.80/22.20	28.00	1.02		
12A-1	60	19.05	11.91	12.57	5.94	25.90	28.60	18.08	-	2.44	31.10/31.80	39.00	1.50		
16A-1	80	25.40	15.88	15.75	7.92	32.70	38.00	24.13	-	3.26	55.60/56.70	71.50	2.60		
20A-1	100	31.75	19.05	18.90	9.53	41.10	44.90	30.18	-	4.00	86.70/88.50	102.00	3.91		
24A-1	120	38.10	22.23	25.22	11.10	50.80	56.10	36.20	-	4.80	124.60/127.00	156.90	5.62		
28A-1	140	44.45	25.40	25.22	12.70	54.90	60.80	42.24	-	5.65	169.00/172.40	210.80	7.50		
32A-1	160	50.80	28.58	31.55	14.27	65.50	72.60	48.26	-	6.45	222.40/226.80	269.70	10.10		
36A-1	180	57.15	35.71	35.48	17.46	72.80	83.00	54.31	-	7.25	280.20	327.80	13.45		
40A-1	200	63.50	39.68	37.85	19.85	80.30	90.50	60.33	-	8.00	347.00/353.80	410.00	16.15		
48A-1	240	76.20	47.63	47.35	23.81	95.50	106.00	72.39	-	9.50	500.40/510.30	585.40	23.20		

*套筒链:表中滚子直径d₁为套筒直径。
*Bush chains: d₁ indicate the external diameter of the bushing.

A系列短节距精密滚子链

Short pitch precision roller chains (A series)

双排
Duplex chains

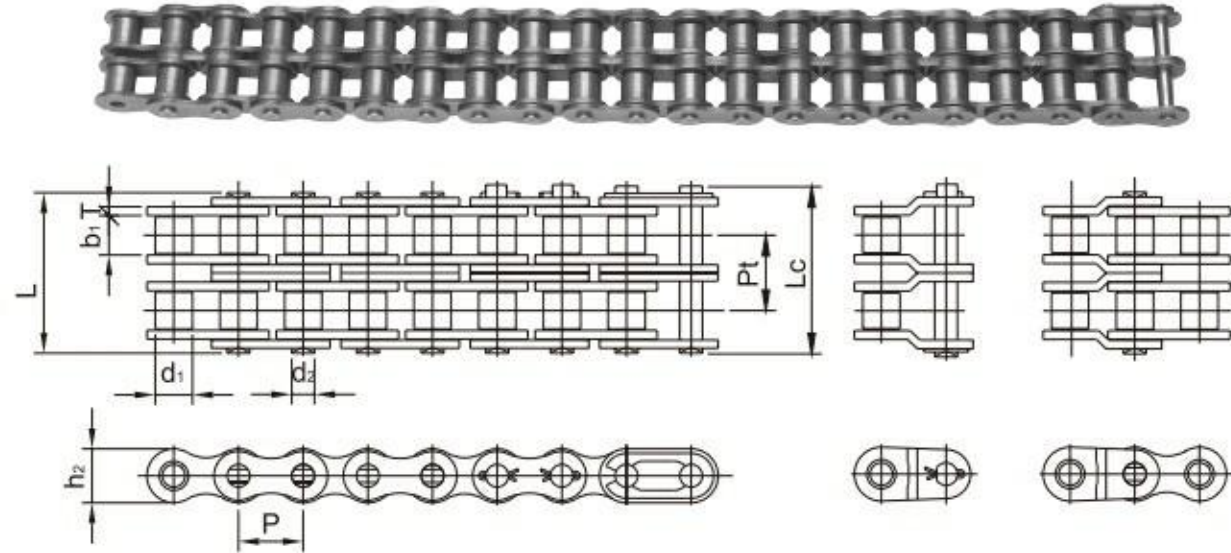


环球 链号 Universal Chain No.	ISO/DIN 链号	节距 Pitch	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	排距 Transverse pitch	链板厚度 Plate thickness	抗拉强度	平均抗拉强度	每米重量	
	ISO/DIN Chain No.		Roller diameter	Width between inner plates	Pin diameter	Pin length		Inner plate depth			Ultimate tensile strength			Average tensile strength
	P		d ₁ max mm	b ₁ min mm	d ₂ max mm	L max mm	Lc max mm	h ₂ max mm			Pt			T
*04C-2	*25-2	6.35	3.30	3.10	2.31	14.50	16.50	6.02	6.40	0.80	7.00	8.80	0.28	
*06C-2	*35-2	9.525	5.08	4.68	3.58	22.50	24.50	8.70	10.13	1.30	15.80	20.80	0.63	
08A-2	40-2	12.70	7.95	7.85	3.96	31.00	33.50	12.07	14.38	1.50	27.60/28.20	35.60	1.12	
10A-2	50-2	15.875	10.16	9.40	5.08	38.90	41.30	15.09	18.11	2.06	43.60/44.40	56.00	2.00	
12A-2	60-2	19.05	11.91	12.57	5.94	48.80	51.50	18.08	22.78	2.44	62.30/63.60	82.40	2.92	
16A-2	80-2	25.40	15.88	15.75	7.92	62.70	67.10	24.13	29.29	3.26	111.20/113.40	143.00	5.15	
20A-2	100-2	31.75	19.05	18.90	9.53	76.40	83.10	30.18	35.76	4.00	173.50/177.00	204.00	7.80	
24A-2	120-2	38.10	22.23	25.22	11.10	96.30	101.60	36.20	45.44	4.80	249.10/254.00	313.80	11.70	
28A-2	140-2	44.45	25.40	25.22	12.70	103.60	109.40	42.24	48.87	5.65	338.10/344.80	421.70	15.14	
32A-2	160-2	50.80	28.58	31.55	14.27	123.30	130.20	48.26	58.55	6.45	444.80/453.60	539.40	20.14	
36A-2	180-2	57.15	35.71	35.48	17.46	138.60	148.50	54.31	65.84	7.25	560.50	655.70	29.22	
40A-2	200-2	63.50	39.68	37.85	19.85	151.90	161.50	60.33	71.55	8.00	693.90/707.60	820.00	32.24	
48A-2	240-2	76.20	47.63	47.35	23.81	183.40	193.90	72.39	87.83	9.50	1000.80/1020.60	1170.80	45.23	

*套筒链:表中滚子直径d₁为套筒直径。
*Bush chains: d₁ indicate the external diameter of the bushing.

A系列短节距精密滚子链

Short pitch precision roller chains (A series)

叁排
Triplex chains

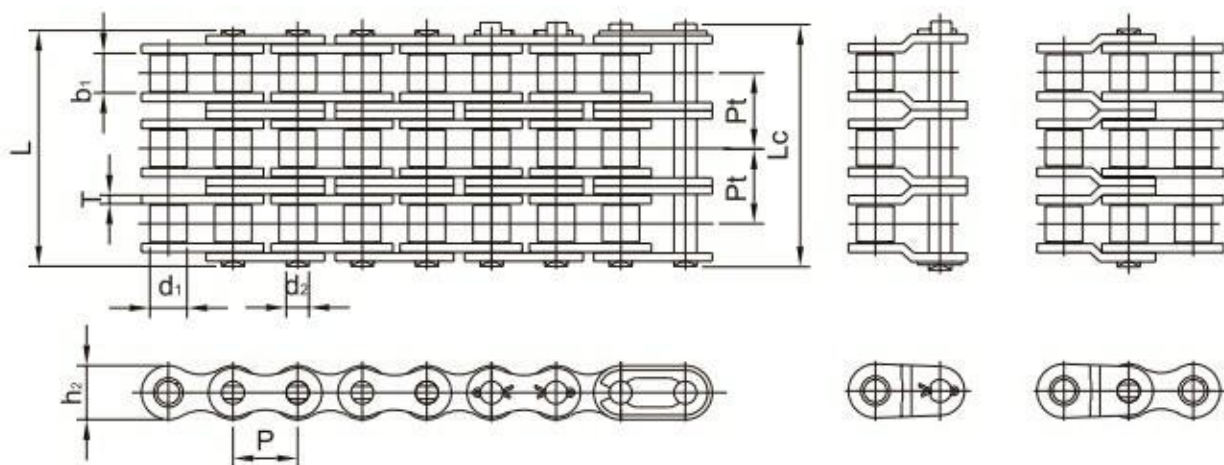

环球 链号 Universal Chain No.	ISO/ DIN 链号 ISO/ DIN Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	排距 ransverse pitch	链板厚度 Plate thickness	抗拉强度 Ultimate tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
		P mm	d ₁ max mm	b ₁ min Mm	d ₂ max mm	L max mm	Lc max mm	h ₂ max mm	Pt mm	T mm	Q(ISO/DIN) min kN	Q ₀ kN	q = kg/m
*06C-3	*35-3	9.525	5.08	4.68	3.58	32.70	34.70	8.70	10.13	1.30	23.70	30.00	1.05
08A-3	40-3	12.70	7.95	7.85	3.96	45.40	48.00	12.07	14.38	1.50	41.40/42.30	51.20	1.90
10A-3	50-3	15.875	10.16	9.40	5.08	57.00	59.80	15.09	18.11	2.06	65.40/66.60	82.00	3.09
12A-3	60-3	19.05	11.91	12.57	5.94	71.50	75.60	18.08	22.78	2.44	93.40/95.40	115.00	4.54
16A-3	80-3	25.40	15.88	15.75	7.92	91.70	96.80	24.13	29.29	3.26	166.80/170.10	208.00	7.89
20A-3	100-3	31.75	19.05	18.90	9.53	112.20	117.20	30.18	35.76	4.00	260.20/265.50	310.00	11.77
24A-3	120-3	38.10	22.23	25.22	11.10	141.70	148.30	36.20	45.44	4.80	373.70/381.00	470.70	17.53
28A-3	140-3	44.45	25.40	25.22	12.70	152.20	158.30	42.24	48.87	5.65	507.10/517.20	632.50	22.20
32A-3	160-3	50.80	28.58	31.55	14.27	181.80	188.60	48.26	58.55	6.45	667.20/680.40	809.00	30.02
36A-3	180-3	57.15	35.71	35.48	17.46	204.40	214.50	54.31	65.84	7.25	840.70	983.60	38.22
40A-3	200-3	63.50	39.68	37.85	19.85	223.50	232.90	60.33	71.55	8.00	1040.90/1061.40	1230.00	49.03
48A-3	240-3	76.20	47.63	47.35	23.81	271.30	281.80	72.39	87.83	9.50	1501.30/1530.90	1756.20	71.60

*套筒链:表中滚子直径 d_1 为套筒直径。

*Bush chains: d_1 indicate the external diameter of the bushing.