
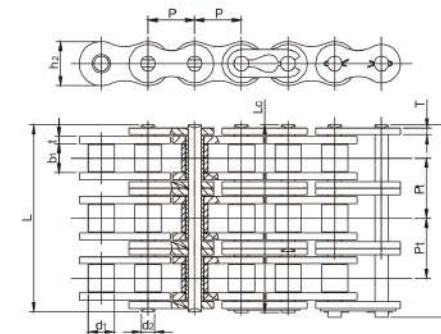
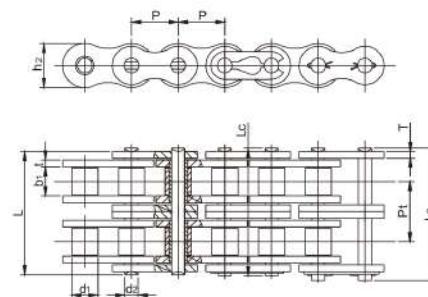
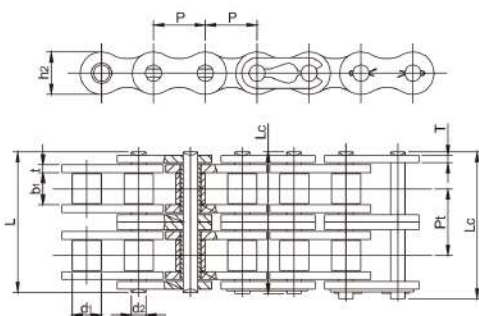


扶手带驱动链

Handrail Driving Chains

主驱动链

Escalator Drive Chains

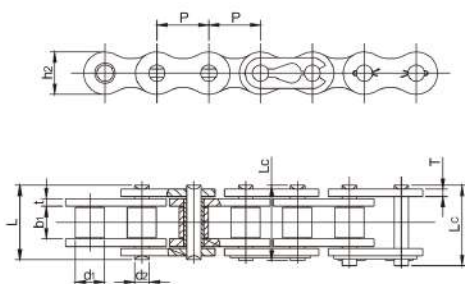

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	抗拉强度 Ultimate tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	t/T	Pt	Q min	Q ₀	q =
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
16A-2	25.40	15.88	15.75	7.92	62.7	64.3	24.00	3.25	29.29	113.40	141.8	5.15
16AFT-2	25.40	15.88	15.75	7.92	62.7	65.8	24.00	3.25	29.29	132.3	165.4	5.51
16B-1	25.40	15.88	17.02	8.28	36.1	37.4	21.00	4.15/3.10	—	60.0	72.8	2.71
16B-2	25.40	15.88	17.02	8.28	68.0	69.3	21.00	4.15/3.10	31.88	106.0	133.0	5.42

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	抗拉强度 Ultimate tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	Lc max	h ₂ max	t/T	Pt	Q min	Q ₀	q =
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
16A-2F	25.4	15.88	15.75	7.92	62.7	67.1	24.13	3.26	29.29	111.2	143.0	5.15
16B-2F	25.4	15.88	17.02	8.28	68.0	73.4	21.08	4.09/3.10	31.88	106.0	126.5	5.42
20A-2F	31.75	19.05	18.90	9.53	76.4	83.1	30.18	4.00	35.76	173.5	215.6	7.80
20B-2F	31.75	19.05	19.58	10.19	79.7	85.8	26.42	4.60/3.60	36.45	170.0	210.0	7.20
20AFT-2	31.75	19.05	18.90	9.53	76.4	80.5	30.10	4.00	35.76	211.68	262.5	8.09
20A-3	31.75	19.05	18.90	9.53	112.2	116.3	30.00	4.00	35.76	265.5	309.6	11.77
20AFT-3	31.75	19.05	18.90	9.53	112.2	116.3	30.10	4.00	35.76	330	395.0	12.1
24A-2	38.10	22.23	25.22	11.10	95.8	99.7	35.70	4.80	45.44	254.00	314.9	11.70
20B-3	31.75	19.05	19.56	10.19	114.2	117.9	26.40	4.60/3.60	36.45	250	290.0	10.82
24B-2	38.10	25.40	25.40	14.63	101.7	106.2	33.20	5.80/4.80	48.36	280.0	319.2	13.40