


高强度滚子链

Super strength chains

A

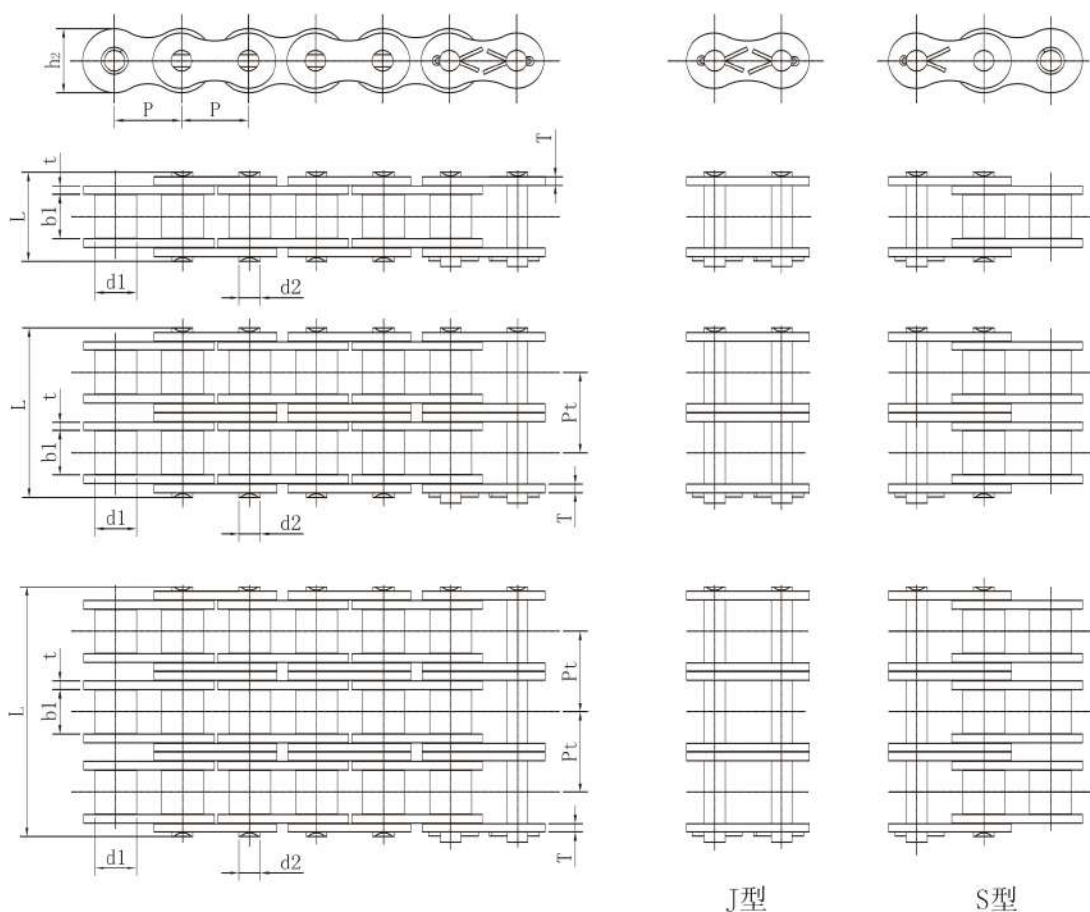


环球链号 Universal Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin Length	链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	抗拉强度 Ultimate tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
	P	d1 max	b1 min	d2 max	L max	h2 max	t/T	Pt	Q min	Q ₀	q ≈
	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	kg/m
T40-1	12.70	7.95	7.85	3.96	17.80	12.07	1.50	—	15.70	20.41	0.62
T50-1	15.875	10.16	9.40	5.08	21.80	15.09	2.06	—	26.50	30.50	1.02
T60-1	19.05	11.91	12.57	5.94	26.90	18.08	2.44	—	40.15	46.20	1.50
T80-1	25.40	15.88	15.88	7.94	33.50	24.13	3.26	—	72.50	80.20	2.80
T80-2	25.40	15.88	15.88	7.94	62.70	24.13	3.26	29.29	143.00	162.20	5.15
T100-1	31.75	19.05	19.05	9.54	41.10	30.18	4.00	—	107.80	127.40	3.91
T100-2	31.75	19.05	19.05	9.54	77.00	30.18	4.00	35.76	215.60	254.80	7.80
T120-1	38.10	22.23	25.40	11.11	50.80	36.20	4.80	—	166.40	181.20	5.62
T120-2	38.10	22.23	25.40	11.11	96.30	36.20	4.80	45.44	332.80	362.40	11.7
T140-1	44.45	25.40	25.40	12.71	54.90	42.24	5.60	—	226.20	240.00	7.5
T140-2	44.45	25.40	25.40	12.71	103.60	42.24	5.60	48.87	458.40	475.00	15.14
T160-1	50.80	28.58	31.55	14.27	65.50	48.26	6.40	—	277.23	318.7	10.10
T160-2	50.80	28.58	31.55	14.27	124.20	48.26	6.40	58.55	554.46	632.40	20.14
T160-3	50.80	28.58	31.55	14.27	182.90	48.26	6.40	58.55	776.35	892.36	30.05

高强度滚子链

Super strength chains

A

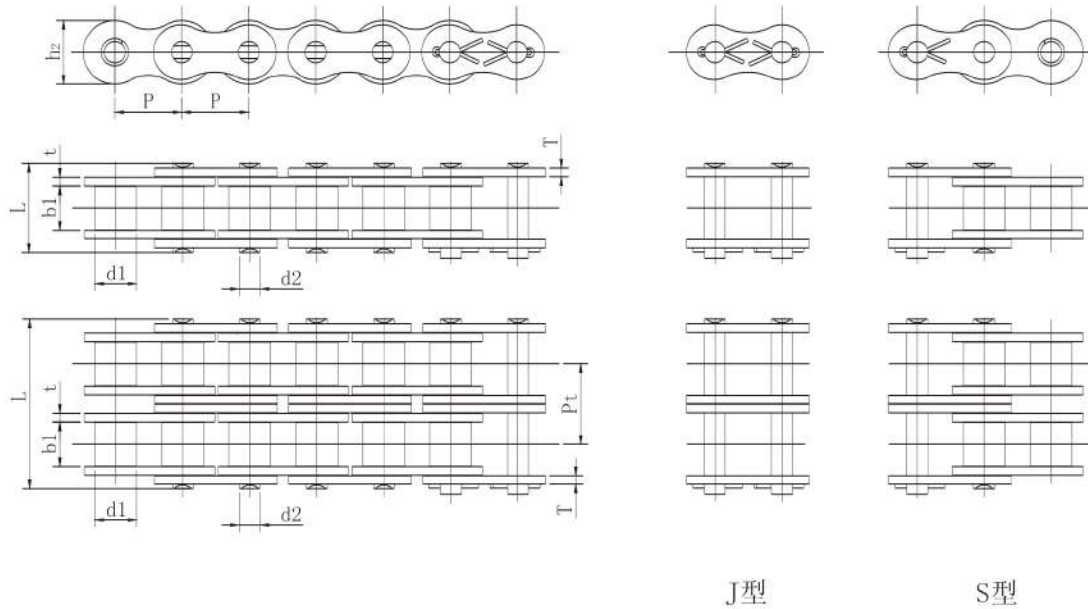

环球链号 Universal Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin Length	链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	抗拉强度 Ultimate tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
	P	d1 max	b1 min	d2 max	L max	B max	t/T	Pt	Q min	Q0	q ≈
	mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	kg/m
HT60-1	19.05	11.91	12.70	5.94	29.90	18.08	3.26	—	42.97	55.86	1.87
HT60-2	19.05	11.91	12.70	5.94	56.00	18.08	3.26	26.11	85.94	111.72	3.71
HT80-1	25.40	15.88	15.88	7.94	37.40	24.13	4.00	—	93.10	94.75	3.10
HT80-2	25.40	15.88	15.88	7.94	69.20	24.13	4.00	32.59	185.00	195.50	6.15
HT100-1	31.75	19.05	19.05	9.54	44.10	30.18	4.80	—	142.10	149.20	4.38
HT100-2	31.75	19.05	19.05	9.54	83.20	30.18	4.80	39.09	284.20	289.40	8.67
HT120-1	38.10	22.23	25.40	11.11	53.80	36.20	5.60	—	181.90	185.40	6.70
HT120-2	38.10	22.23	25.40	11.11	102.70	36.20	5.60	48.87	363.80	372.50	13.32
HT140-1	44.45	25.40	25.40	12.71	58.00	42.24	6.40	—	232.30	245.90	8.53
HT140-2	44.45	25.40	25.40	12.71	110.20	42.24	6.40	52.20	464.60	482.40	17.0
HT160-1	50.80	28.58	31.55	14.27	68.80	48.26	7.25	—	273.00	314.00	11.10
HT160-2	50.80	28.58	31.55	14.27	130.5	48.26	7.25	61.90	545.00	628.00	22.1
#T80G-1	25.40	15.88	15.75	8.71	38.10	24.70	4.0/4.8	—	108.00	122.40	4.2
SHT80-1	25.40	15.88	15.88	7.94	37.40	24.13	4.00	—	96.04	98.00	3.10
SHT100-1	31.75	19.05	19.05	9.54	44.10	30.18	4.80	—	149.50	155.40	4.38
SHT120-1	38.10	22.23	25.40	11.11	53.80	36.20	5.6	—	186.40	196.000	6.70
SHT140-1	44.45	25.40	25.40	12.71	58.00	42.24	6.40	—	245.40	254.80	8.53
SHT160-1	50.80	28.58	31.55	14.27	68.80	48.26	7.25	—	280.30	323.4	11.10

注：#链板为直板型，外链板厚度4.0，内链板厚度4.8

Note:#Straight side plate,out plate thickness4.0,inner plate thickness4.8