


双节距传动链

Double pitch transmission chains

A

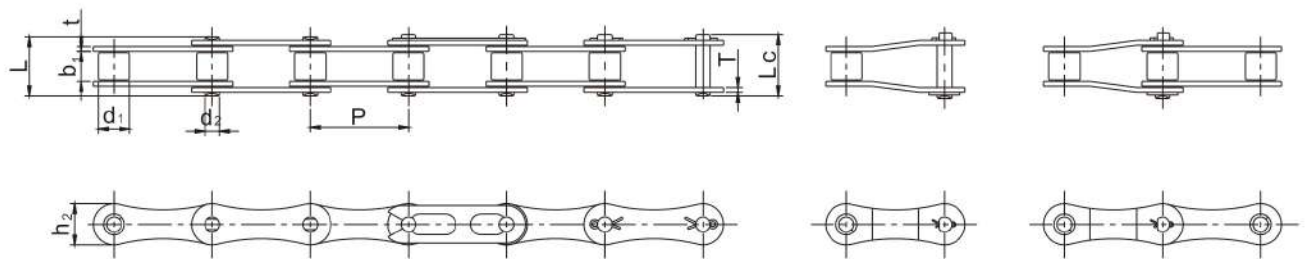


ISO/ DIN 链号 ISO/ DIN Chain No.	ANSI 链号 ANSI Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Ultimate tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
		P	d ₁ max	b ₁ min	d ₂ max	L max	Lc max	h ₂ max	t/T	Q(ISO/DIN) min	Q ₀	q
		mm	mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
208A	2040	25.40	7.95	7.85	3.96	17.80	21.70	12.07	1.50	13.80/14.10	17.10	0.42
208B		25.40	8.51	7.75	4.45	17.00	20.90	11.81	1.60	17.80/18.00	19.60	0.45
210A	2050	31.75	10.16	9.40	5.08	21.80	25.90	15.09	2.06	21.80/22.20	28.00	0.73
210B		31.75	10.16	9.65	5.08	19.50	20.90	14.70	1.70	22.20/22.40	27.50	0.65
212A	2060	38.10	11.91	12.57	5.94	26.90	31.50	18.08	2.44	31.10/31.80	39.00	1.02
212B		38.10	12.07	11.68	5.72	22.50	24.20	16.00	1.85	28.90/29.00	33.30	0.76
216A	2080	50.80	15.88	15.75	7.92	33.50	38.90	24.13	3.26	55.60/56.70	71.50	1.70
216B		50.80	15.88	17.02	8.28	36.10	39.10	21.00	4.10/3.10	60.00	71.00	1.75
220A	2100	63.50	19.05	18.90	9.53	41.10	47.20	30.18	4.00	86.70/88.50	102.00	2.55
220B		63.50	19.05	19.56	10.19	41.30	45.00	26.40	4.60/3.60	95.00	101.80	1.95


双节距传动链附板

Double pitch transmission chains attachments


A-1

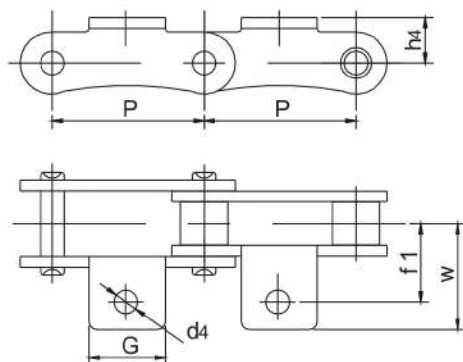


K-1

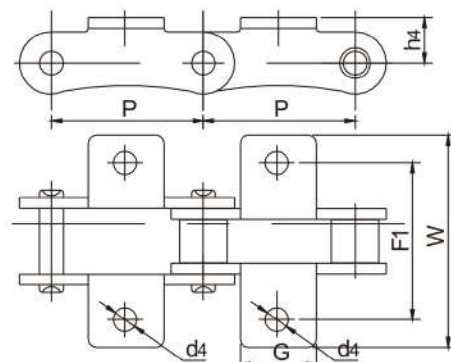

SA-1

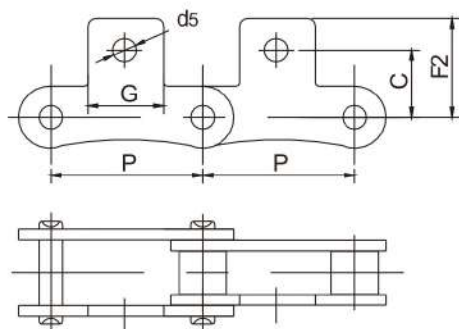

SK-1

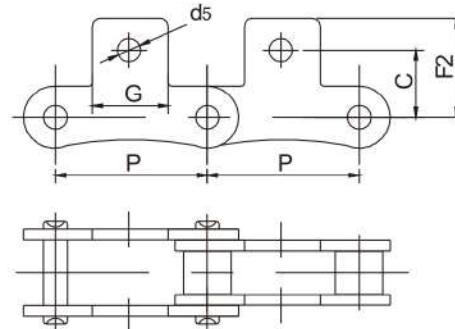

ISO/DIN 链号 ISO/DIN Chain No	ANSI 链号 ANSI Chain No	节距 Pitch P	G	F1/f1	W/w	h 4	d 4	C	F 2	d 5
		mm	mm	mm	mm	mm	mm	mm	mm	mm
208A	2040	25.40	19.1	25.4/12.7	39.6/19.8	9.1	3.4	11.1	20.5	5.5
210A	2050	31.75	23.8	31.8/15.9	49.0/24.5	11.1	5.5	14.3	25.0	6.6
212A	2060	38.10	28.6	42.9/21.45	67.8/33.9	14.7	5.5	17.5	32.9	9.2
216A	2080	50.80	38.1	55.6/27.8	87.8/43.9	19.1	6.8	22.2	43.5	11.0
220A	2100	63.50	47.6	66.6/33.3	107.5/53.75	23.4	9.2	28.6	50.4	13.0
224A	2120	76.20	57.2	79.3/39.65	121.4/60.7	27.8	10.5	33.3	55.5	15.0
208B		25.40	13.0	26.2/13.1	38.6/19.3	10.0	4.5	14.7	20.3	4.5
210B		31.75	23.8	31.8/15.9	49.0/24.5	11.1	5.5			
212B		38.10	19.0	37.0/18.5	52.0/26.0	11.0	6.6			
216B		50.80	44.0	50.8/25.4	84.0/42.0	19.1	6.6			
220B		63.50	52.0	63.5/31.75	104.0/52.0	23.4	8.4			
224B		76.20	60.0	76.2/38.1	120.0/60.0	27.8	10.5			