


公共交通型自动扶梯梯级链


Public Transport Escalator Chains

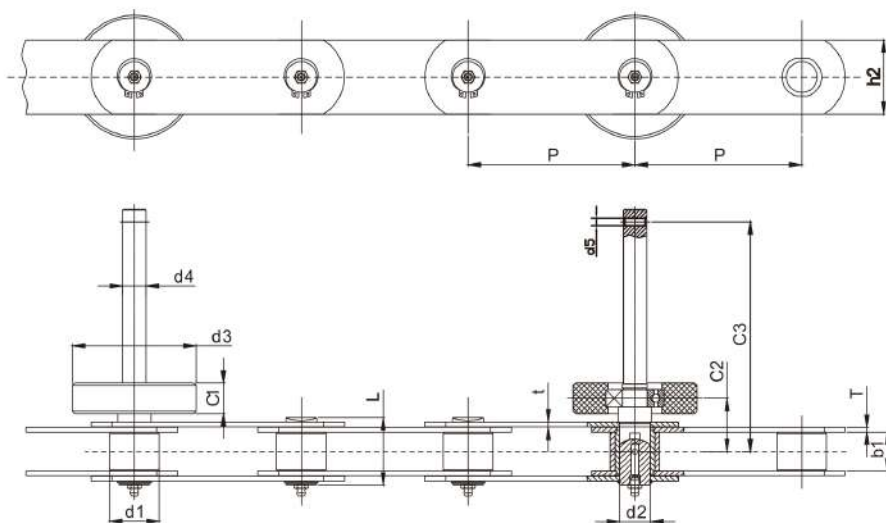

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length	链板高度 Plate depth	链板厚度 Plate thickness	尺寸参数表 Dimension chart							抗拉强度 Ultimate tensile strength	一级链节数 One-step link no.	梯级距 Distance between steps
	P	d ₁ max min	b ₁ max min	d ₂ max min	L max min	h ₁ max min	T/t	d3	d4	d5	C1	C2	C3	Q min	kN		mm
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm			
TL135Ha	135	54	31.3	40	61.6	75	5	100	19	6.2	25	43	185.6	320		3	405
TL135Hb	135	40	31.3	26	57.6	60	4.5	100	19	6.2	25	43	185.6	205		3	405
TL135Hc	135	54	31.3	32.5	60	75	5	100	19	6.2	25	43	185.6	270		3	405
TL135Hd	135	54	31.3	40.2	65.75	75	7/5.5	100	19	6.2	25	43	185.6	408		3	405

公共交通型自动扶梯梯级链

Public Transport Escalator Chains

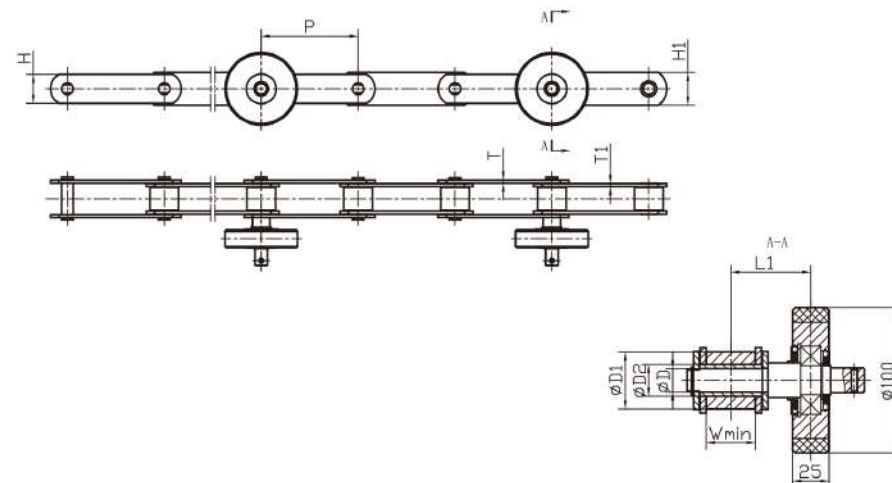


规格 Chain No.	节距 Pitch	尺寸参数表 Dimension chart									抗拉强度 Ultimate tensile strength
		P	∅ D	∅ D1 *	∅ D2	W *	T	T1	H	H1	L1 *
TL133w3c	133.33	20	39.37	26	34	5	5	40	45	55	130000
	133.33	20	39.37	26	34	5	5	40	45	55	180000
TL133Hqb3	133.33	20	39.37	26	34	5	5	45	50	55	200000
TL133Hqb5	133.33	20	39.37	26	34	5	5	45	50	52.5	200000
TL133Hqb16	133.33	22	39.37	26	34	5	6	50	50	55	230000
TL133Hqc1b	133.33	22	39.37	30	34	5	6	50	50	52.5	260000
TL133Hqc1e	133.33	22	39.37	30	34	5	6	50	50	55	260000
TL133Hqc1d	133.33	22	39.37	30	34	5	6	50	50	60	260000
TL133Hqd9a	133.33	35	63.5	43	34	6	7	70	70	52.5	350000
TL133Hqd6a	133.33	35	63.5	43	34	6	6	75	75	52.5	400000
TL133Hmc	133.33	40	55	47	34	7	8	75	75	52	500000
TL133Hqd3	133.33	36	63.5	43	34	8	8	75	75	52.5	520000
TL133Hmc2	133.33	58.5	84	70	60	12	14	110	110	82	960000

注: 1. TL133w3c链板不热处理时链条抗拉载荷 130000N, 链板热处理时链条抗拉载荷 180000N;
2. 带*尺寸可根据客户梯型需要个性化设计

公共交通型自动扶梯梯级链

Public Transport Escalator Chains

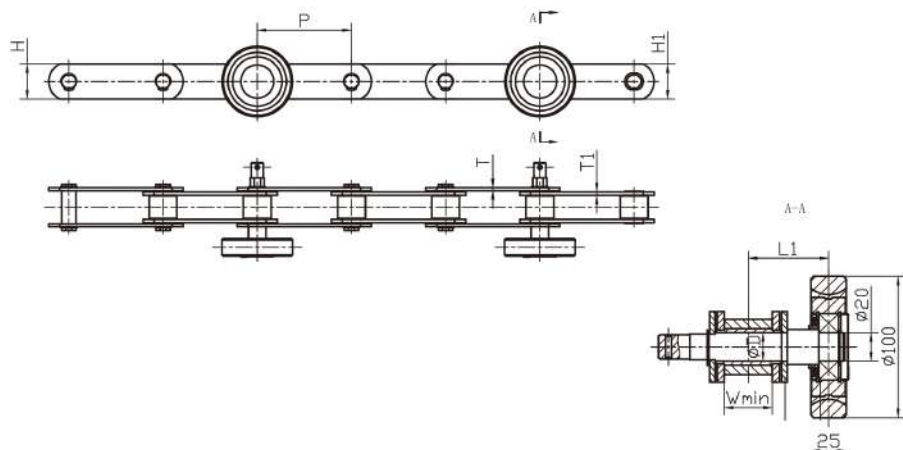


规格 Chain No.	节距 Pitch	尺寸参数表 Dimension chart									抗拉强度 Ultimate tensile strength
		P	Ø D	Ø D1 *	Ø D2	W *	T	T1	H	H1	
TL133w3cy	133.3	20	39.37	26	34	5	5	40	45	55	130000
	133.3	20	39.37	26	34	5	5	40	45	55	180000
TL133Hx4	133.3	20	45	26	28	5	5	45	50	41	180000
TL133Hqb	133.3	20	40	26	26.8	5	5	55	60	40.5	200000
TL133Hqb1	133.3	20	39.37	26	34	5	5	45	50	55	200000
TL133H2	133.3	20	39.37	26	34	5	5	45	50	46.5	200000
TL133Hq	133.3	25	45	35	27	5	6	70	70	40.5	250000
TL133Hqc1	133.3	22	39.37	30	34	5	6	50	50	55	260000
TL133Hc1	133.3	23	39.37	30	33.7	5	5	55	55	46.5	260000
TL133Hx2	133.3	25	45	35	28	5	6	60	60	41	280000
TL133Hqa	133.3	35	55	45	26.8	5	6	80	80	40.5	350000
TL133Hqd9	133.3	35	52.3	43	34	6	7	70	70	56.8	350000
TL133Hqd6	133.3	35	55	43	34	6	6	75	75	46.5	400000
TL133Hqa2	133.3	40	55	47	26.8	5	6	80	80	40.5	400000
TL133Hqd10	133.3	35	52.3	43	54	7	7	70	80	66.8	480000
TL133Hma	133.3	40	55	47	33.7	7	8	75	75	51.5	500000
TL133Hqd3y	133.3	36	63.5	43	34	8	8	75	75	55	520000


注: 1. TL133w3c链板不热处理时链条抗拉载荷 130000N, 链板热处理时链条抗拉载荷 180000N;
2. 带*尺寸可根据客户梯型需要个性化设计

公共交通型自动扶梯梯级链

Public Transport Escalator Chains

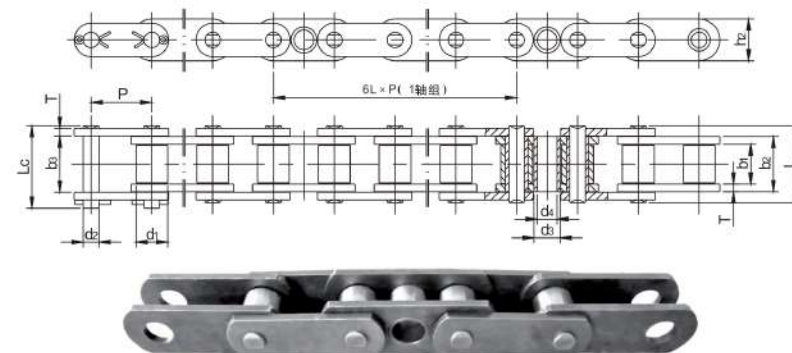

链号 Chain No.	节距 Pitch	尺寸参数表 Dimension chart											抗拉强度 Ultimate tensile strength	每米重量 Weight per meter	
		P	d ₁ max	d ₂ max	d ₃	d ₄	b ₁ min	b ₂ max	b ₃ min	h ₂ max	L max	L _c max	T	Q _s kN	q kg/m
TL67.73	67.73	35.4	17.46	29	22	43.3	61.3	62.3	46.4	85.5	91.8	8.5	274.4	13.5	

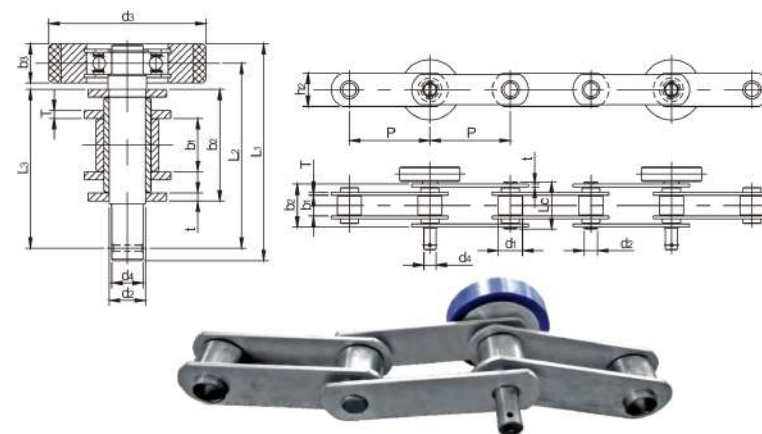


链号 Chain No.	节距 Pitch	尺寸参数表 Dimension chart														抗拉强度 Ultimate tensile strength
		P	d ₁ max	d ₂ max	d ₃	d ₄	b ₁ min	b ₂ max	b ₃	h ₂ max	L _c max	T/t	L ₁	L ₂	L ₃	Q _s kN
	TL133Hc	133.33	45	23	100	20	33.7	71	25	55	78.5	5.0	138	117.5	101	260.0
TL133Hd	133.33	55	32	100	20	33.7	71	25	75	79	6.0/5.0	138	117.5	101	400.0	
TL133Hm	133.33	55	40	100	20	33.7	71	25	75	79.2	8.0/7.0	138	117.5	101	500.0	

公共交通型自动扶梯梯级链

Public Transport Escalator Chains

C

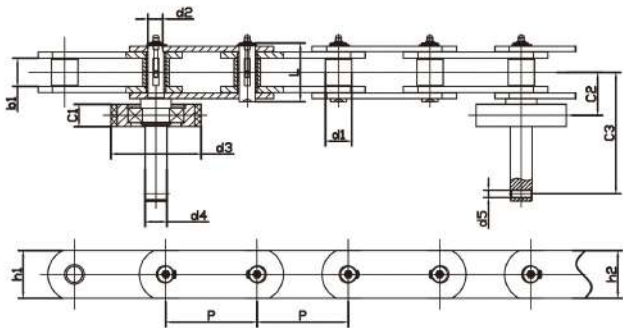

规格 Chain No.	节距 Pitch	*滚子直径 Roller diameter	内节内宽 Width between inner plates		销轴直径 Pin diameter	内链板高度 Inner chain plate height	外链板高度 Outer chain plate height	销轴长度 Pin length	尺寸参数表 Dimension chart							抗拉强度 Ultimate tensile strength	附件型式 Attachment type	一节链节数 One-step link no.	梯级距 Distance between steps		
			b1 min	d2 max					h1	h2	L max	d3	d4	d5	C1					C2	C3
TL101.25	101.25	40	31.3	23	55	50	60.6	100	24	8	25	47.9	159.2	250	D	4	405				
TL101.25a	101.25	29.21	31.3	17.78	53	53	65	100	24	8	25	48.3	159.3	245	D	4	405				
TL101.25b	101.25	40	31.3	23	53	50	62.65	100	24	8	25	47.65	237.6	245.25	D	4	405				
TL101.25c	101.25	40	31.3	25	53	53	64.4	100	24	8	25	49.5	160.8	260	D	4	405				
TL101.25d	101.25	29.21	31.3	17.78	46	46	63.8	100	24	8	25	49.65	159.25	166.7	D	4	405				
TL101.25e	101.25	40	31.3	23	53	53	62.65	100	24	8	25	48.05	159.3	186	D	4	405				
TL101.25g	101.25	40	31.3	23	55	50	60.6	100	24	8	25	48	159.2	250	D	4	405				

注：1.带*尺寸可根据客户梯型需要个性化设计