
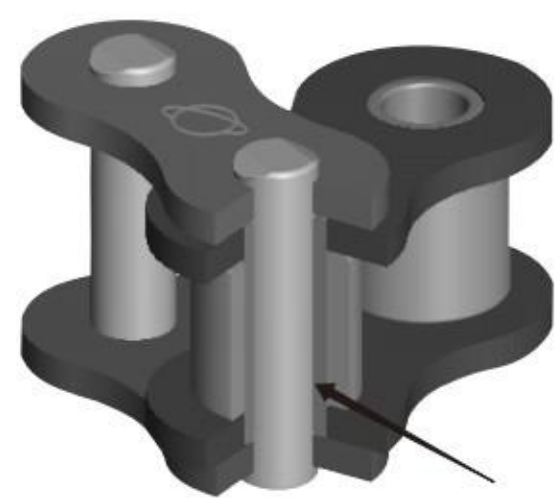


自润滑滚子链

Lubrication-free roller chains

A

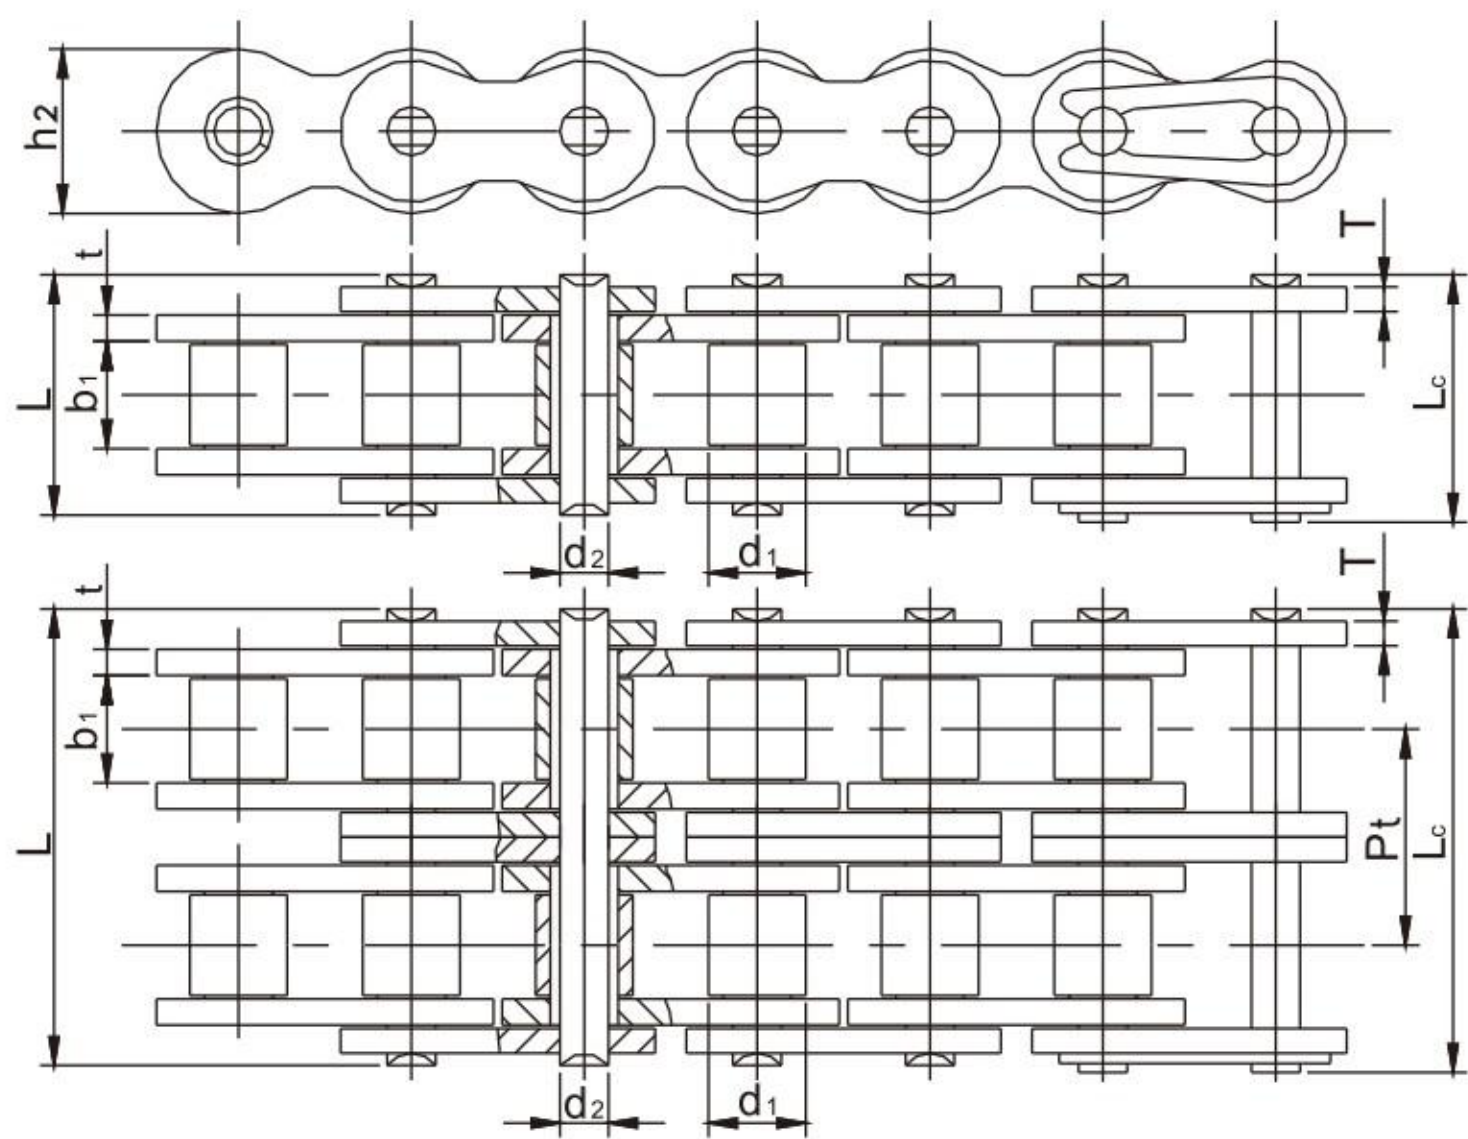

自润滑无缝套筒
Sintered lube free solid bush

链号 Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Linner plate depth	链板厚度 Plate thickness	排距 ransverse Pitch	抗拉强度 Ultimate tensile Strength	每米重量 Weight Per Meter
	P	d ₁ max	b ₁ min	d ₂ max	L max	Lc max	h ₂ max	t/T	Pt	Q min	q ≈
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN/LB	Kg/m
08BSLR	12.70	8.51	7.75	4.45	16.7	18.2	11.80	1.6	—	18.0/4091	0.69
08BSLRF1	12.70	8.51	7.75	4.45	17.3	18.7	11.80	1.6	—	18.0/4091	0.72
10BSLR	15.875	10.16	9.65	5.08	19.5	20.9	14.70	1.7	—	22.4/5091	0.93
10BSLRF1	15.875	10.16	9.65	5.08	19.9	21.6	14.70	1.7	—	22.4/5091	0.97
12BSLR	19.05	12.07	11.68	5.72	22.5	24.2	16.00	1.85	—	29.0/6591	1.15
12BSLRF1	19.05	12.07	11.68	5.72	22.9	24.7	16.00	1.85	—	29.0/6591	1.19
16BSLR	25.40	15.88	17.02	8.28	36.1	37.4	21.00	4.15/3.10	—	60.0/13636	2.71
16BSLRF1	25.40	15.88	17.02	8.28	36.7	39.7	21.00	4.15/3.10	—	60.0/13636	2.73
40SLR	12.70	7.95	7.85	3.96	16.6	17.8	12.00	1.5	—	14.1/3205	0.62
50SLR	15.875	10.16	9.40	5.08	20.7	22.2	15.09	2.03	—	22.0/5045	1.02
60SLR	19.05	11.91	12.57	5.94	27.5	29.3	18.00	3.25/3.42	—	34.2/7772	1.65
80SLR	25.40	15.88	15.75	7.92	32.7	35.0	24.00	3.25	—	56.7/12886	2.60
08SLR-2	12.70	8.51	7.75	4.45	31.2	32.2	11.80	1.6	13.92	32.0/7273	1.34
10BSLR-2	15.875	10.16	9.65	5.08	36.1	37.5	14.70	1.7	16.59	44.5/10114	1.84
12BSLR-2	19.05	12.07	11.68	5.72	42.0	43.6	16.00	1.85	19.46	57.8/13136	2.31
16BSLR-2	25.40	15.88	17.02	8.28	68.0	69.3	21.00	4.15/3.10	31.88	106.0/24091	5.42
40SLR-2	12.70	7.95	7.85	3.96	31.0	32.2	12.00	1.5	14.38	28.2/6409	1.12
50SLR-2	15.875	10.16	9.40	5.08	38.9	40.4	15.09	2.03	18.11	44.4/10091	2.00
60SLR-2	19.05	11.91	12.57	5.94	50.3	52.1	18.00	3.25/3.42	22.78	68.4/15544	3.21
80SLR-2	25.40	15.88	15.75	7.92	62.7	64.3	24.00	3.25	29.29	113.4/25773	5.15