



1) 单排链


无滚子型
Without roller type

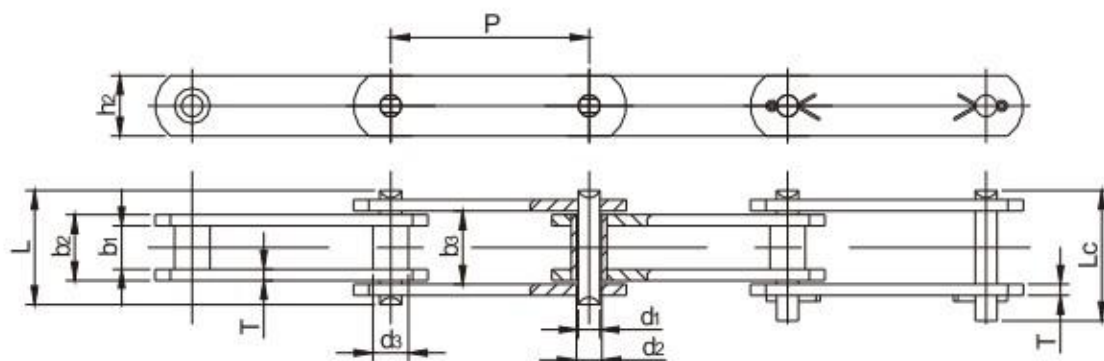


带有A型小滚子型
With A small roller type

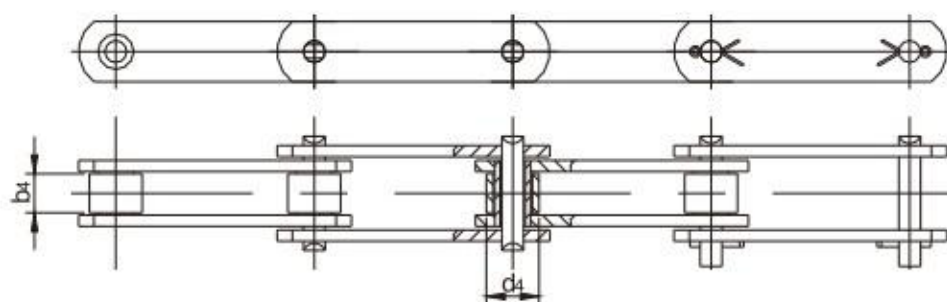

带有B和C型大滚子
With B&C large roller type

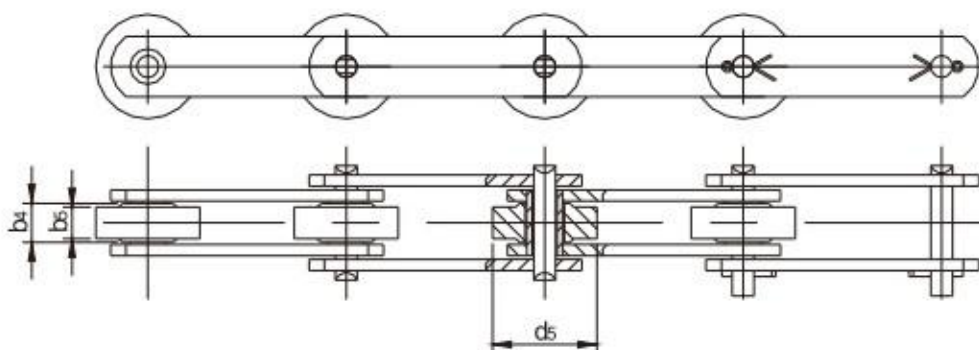

带有F和G型带边滚子
With F&G flange roller type

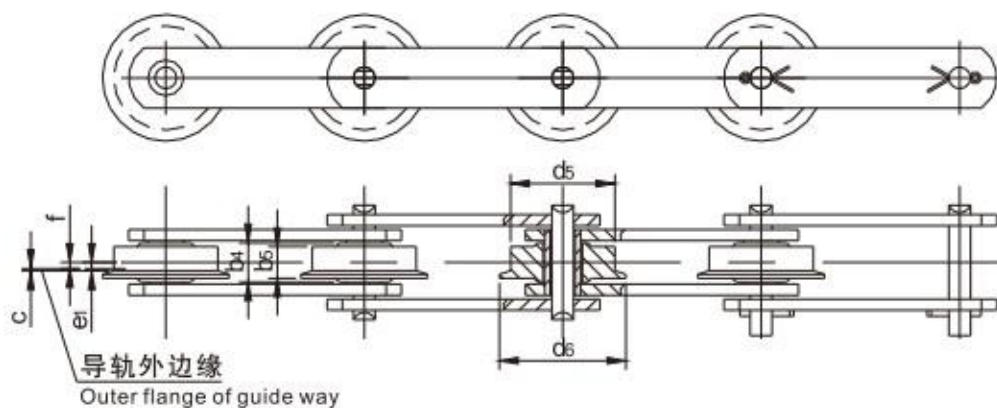

米制输送链

Conveyor chains (M series)

米制输送链

Conveyor chains (M series)


表1(chart 1)

ISO 链号 ISO Chain No.	节 距 pitch P	尺 寸 参 数 表 Dimension chart									
		b ₁ min	b ₂ max	b ₃ min	b ₄ max	b ₅ max	b ₆ max	d ₁ max	d ₂ min	d ₃ max	d ₄ max
M20	40 · 50 · 63 · 80 100 · 125 · 160	16	22	22.2	15	14	24.5	6	6.1	9	12.5
M28	50 · 63 · 80 · 100 125 · 160 · 200	18	25	25.2	17	16	28	7	7.1	10	15
M40	63 · 80 · 100 · 125 160 · 200 · 250	20	28	28.3	19	18	31.5	8.5	8.6	12.5	18
M56	63 · 80 · 100 · 125 160 · 200 · 250	24	33	33.3	23	22	36	10	10.1	15	21
M80	80 · 100 · 125 · 160 200 · 250 · 315	28	39	39.4	27	26	43	12	12.1	18	25
M112	80 · 100 · 125 · 160 200 · 250 · 315	32	45	45.5	31	29	50.5	15	15.1	21	30
M160	100 · 125 · 160 · 200 250 · 315 · 400	37	52	52.5	36	34	58.5	18	18.1	25	36
M224	125 · 160 · 200 · 250 315 · 400 · 500	43	60	60.6	42	40	67	21	21.2	30	42
M315	160 · 200 · 250 · 315 400 · 500 · 630	48	70	70.7	47	45	77	25	25.2	36	50
M450	00 · 250 · 315 · 400 500 · 630 · 800	56	82	82.8	55	51	92.5	30	30.2	42	60
M630	50 · 315 · 400 · 500 630 · 800 · 1000	66	96	97	65	61	107	36	36.2	50	70
M900	50 · 315 · 400 · 500 630 · 800 · 1000	78	112	113	76	70	127	44	44.2	60	85

续表1 (continue chart 1)

ISO 链号 ISO Chain No.	尺 寸 参 数 表 Dimension chart									支 承 面 积 Bearing area S cm ² (每 排)	抗 拉 强 度 Ultimate tensile strength Q(min) (/kN)	
	d ₅ max	d ₆ max	d ₇ max	e ₁ =c+f		h ₂	L _c max	L max	T		单 排	双 排
M20	25	30	7	1	3	18	49	35	2.5	1.32	20	40
M28	30	36	8.5	1	3.5	20	56	40	3	1.75	28	56
M40	36	42	10	1	3.5	25	63	45	3.5	2.38	40	80
M56	42	50	12	1.5	4.5	30	72	52	4	3.30	56	112
M80	50	60	15	2	5	35	86	62	5	4.68	80	160
M112	60	70	18	2.5	5	40	101	73	6	6.75	112	224
M160	70	85	21	3	5.5	50	117	85	7	9.36	160	320
M224	85	100	25	3	7	60	134	98	8	12.6	224	448
M315	100	120	30	3	7.5	70	154	112	10	17.5	315	630
M450	120	140	35	3.5	8	80	185	135	12	24.6	450	900
M630	140	170	42	3.5	11	100	214	154	14	34.56	630	1260
M900	170	210	50	3.5	13.5	120	254	180	16	49.28	900	1800

2) 双排链

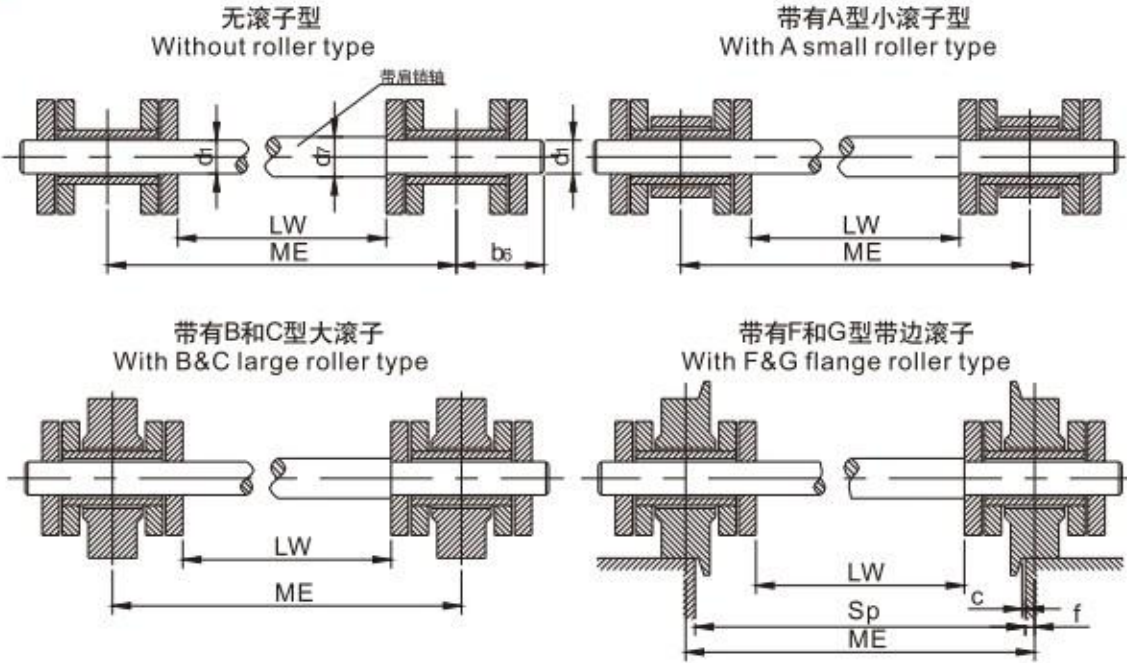

ISO 链号 ISO Chain No.	滚子形式 Roller type	轨 距 Gauge Pitch													
		Sp	250	315	400	500	630	800	1000	1250	1400	1600	1800	2000	
M20	A、B、F、	ME	256	321	406	506	-	-	-	-	-	-	-	-	
		LW	229	294	379	479	-	-	-	-	-	-	-	-	
ME		257	322	407	507	-	-	-	-	-	-	-	-		
LW		225	290	375	475	-	-	-	-	-	-	-	-		
ME		257	322	407	507	637	-	-	-	-	-	-	-		
LW		221	286	371	471	601	-	-	-	-	-	-	-		
ME		259	324	409	509	639	-	-	-	-	-	-	-		
LW		217	282	367	467	597	-	-	-	-	-	-	-		
ME		260	325	410	510	640	810	-	-	-	-	-	-		
LW		210	275	360	460	590	760	-	-	-	-	-	-		
M112		ME	260	325	410	510	640	810	1010	-	-	-	-	-	
		LW	202	267	352	452	582	752	952	-	-	-	-	-	
M160		ME	261	326	411	511	641	811	1011	1261	-	-	-	-	
		LW	194	259	344	444	574	744	944	1194	-	-	-	-	
M224		ME	264	329	414	514	644	814	1014	1264	1414	1614	1814	2014	
		LW	187	252	337	437	567	737	937	1187	1337	1537	1737	1937	
M315	ME	265	330	415	515	645	815	1015	1265	1415	1615	1815	2015		
	LW	174	239	324	424	554	724	924	1174	1324	1524	1724	1924		
M450	ME	-	331	416	516	646	816	1016	1266	1416	1616	1816	2016		
	LW	-	223	308	408	538	708	908	1158	1308	1508	1708	1908		
M630	ME	-	337	422	522	652	822	1022	1272	1422	1622	1822	2022		
	LW	-	211	296	396	526	696	896	1146	1296	1496	1696	1896		
M900	ME	-	-	427	527	657	827	1027	1277	1427	1627	1827	2027		
	LW	-	-	281	381	511	681	881	1131	1281	1481	1681	1881		