
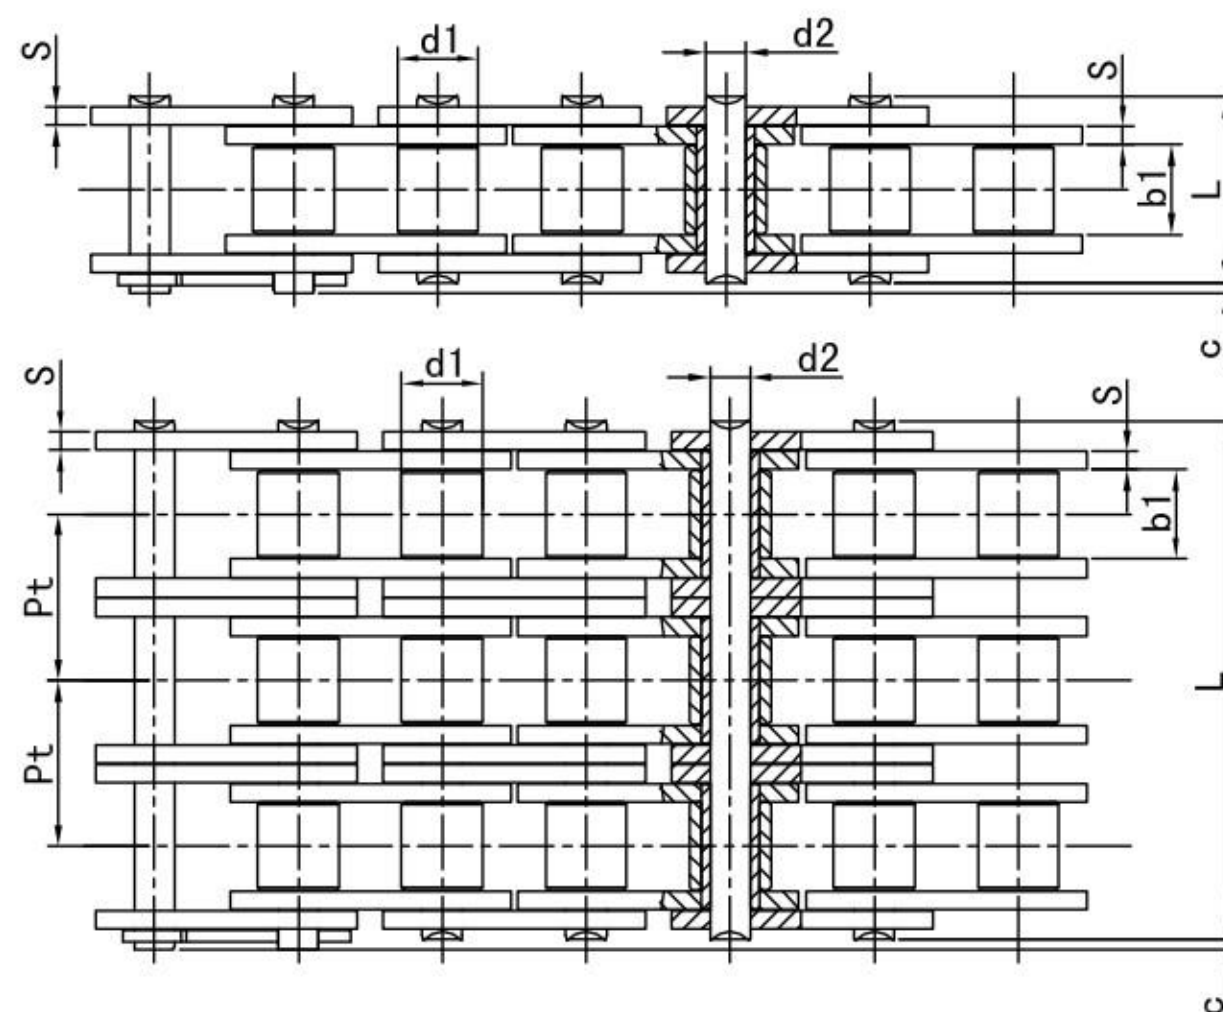


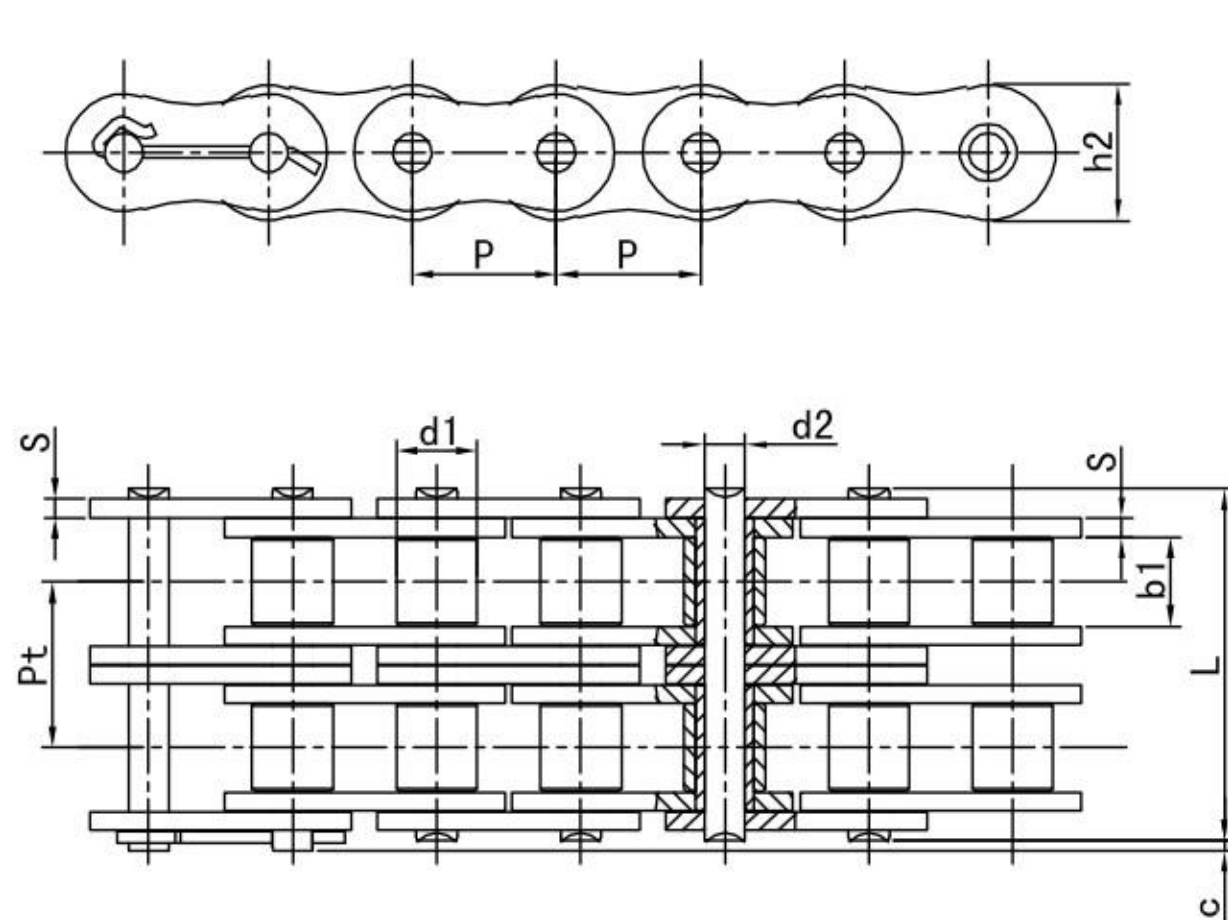

A系列短节距传动用低速重载精密滚子链（港机链）

Low Speed and Heavy duty A Series Short Pitch Precision Roller Chains for Transmission (Port Machine Chains)

环球链号 Universal Chain No.	节距 Pitch	滚子直径 Roller diameter	内链节内宽 Inner width of inner chain link	销轴直径 Bearing pin diameter	链板厚度 Plate thickness	链板高度 Plate height	排距 Array pitch	销轴长度 Bearing pin length	止锁件附加宽度 Additional width of lock device	抗拉载荷 Tensile load	每米重量 Weight/m
	P	d ₁ max	b ₁ min	d ₂ max	s	h ₂ max	Pt	L max	c	min	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
80Sw-1	25.40	Φ15.80	15.75min	Φ7.90	3.18	24.13	/	32.60	3.60	70.60	2.76
80Sw-2	25.40	Φ15.80	15.75min	Φ7.90	3.18	24.13	29.29	61.90	3.60	141.20	5.45
80Sw-3	25.40	Φ15.80	15.75min	Φ7.90	3.18	24.13	29.29	91.20	3.60	211.80	8.15
80Sw-4	25.40	Φ15.80	15.75min	Φ7.90	3.18	24.13	29.29	120.50	3.60	282.40	10.82
100Sw-1	31.75	Φ19.00	18.90min	Φ9.50	3.96	30.18	/	39.60	4.00	105.90	4.15
100Sw-2	31.75	Φ19.00	18.90min	Φ9.50	3.96	30.18	35.76	75.40	4.00	211.80	8.20
100Sw-3	31.75	Φ19.00	18.90min	Φ9.50	3.96	30.18	35.76	111.20	4.00	317.70	12.25
100Sw-4	31.75	Φ19.00	18.90min	Φ9.50	3.96	30.18	35.76	147.00	4.00	423.60	16.31
120Sw-1	38.10	Φ22.20	25.23min	Φ11.10	4.75	36.20	/	49.90	4.20	150.00	6.05
120Sw-2	38.10	Φ22.20	25.23min	Φ11.10	4.75	36.20	45.44	95.30	4.20	300.00	11.99
120Sw-3	38.10	Φ22.20	25.23min	Φ11.10	4.75	36.20	45.44	140.80	4.20	450.00	17.93
120Sw-4	38.10	Φ22.20	25.23min	Φ11.10	4.75	36.20	45.44	186.20	4.20	600.00	23.82
140Sw-1	44.45	Φ25.40	25.23min	Φ12.70	5.56	42.24	/	53.70	4.70	194.20	7.99
140Sw-2	44.45	Φ25.40	25.23min	Φ12.70	5.56	42.24	48.87	102.60	4.70	388.40	15.44
140Sw-3	44.45	Φ25.40	25.23min	Φ12.70	5.56	42.24	48.87	151.40	4.70	582.60	23.09
140Sw-4	44.45	Φ25.40	25.23min	Φ12.70	5.56	42.24	48.87	200.30	4.70	776.80	30.72
160Sw-1	50.80	Φ28.50	31.55min	Φ14.20	6.35	48.26	/	63.90	5.10	247.10	10.33
160Sw-2	50.80	Φ28.50	31.55min	Φ14.20	6.35	48.26	58.55	122.50	5.10	494.20	20.50
160Sw-3	50.80	Φ28.50	31.55min	Φ14.20	6.35	48.26	58.55	181.00	5.10	741.30	30.67
160Sw-4	50.80	Φ28.50	31.55min	Φ14.20	6.35	48.26	58.55	239.60	5.10	988.40	40.85

A系列加强型短节距传动用低速重载精密滚子链（港机链）

Strengthened Low Speed and High Load A Series Small Pitch Precision Roller Chains for Transmission (Port Machine Chains)

环球链号 Universal Chain No.	节距 Pitch	滚子直径 Roller diameter	内链节内宽 Inner width of inner chain link	销轴直径 Bearing pin diameter	链板厚度 Plate thickness	链板高度 Plate height	排距 Array pitch	销轴长度 Bearing pin length	止锁件附加宽度 Additional width of lock device	抗拉载荷 Tensile load	每米重量 Weight/m
	P	d ₁ max	b ₁ min	d ₂ max	s	h ₂ max	Pt	L max	c	min	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
80HSw-1	25.40	15.87	15.75	7.94	3.96	24.13		35.90	3.60	82.10	3.20
80HSw-2	25.40	15.87	15.75	7.94	3.96	24.13		68.40	3.60	164.20	6.34
100HSw-1	31.75	19.05	18.90	9.54	4.75	30.18		42.90	4.00	119.20	4.71
100HSw-2	31.75	19.05	18.90	9.54	4.75	30.18		82.00	4.00	238.40	9.33
120HSw-1	38.10	22.22	25.23	11.11	5.56	36.20		53.30	4.20	163.30	6.72
120HSw-2	38.10	22.22	25.23	11.11	5.56	36.20		102.20	4.20	326.60	13.35
200HSw-1	63.50	39.67	37.85	22.00	9.52	60.33		84.60	6.60	440.00	20.00
200HSw-2	63.50	39.67	37.85	22.00	9.52	60.33		162.90	6.60	880.00	39.20
200HSw-3	63.50	39.67	37.85	22.00	9.52	60.33		241.20	6.60	1320.00	58.50