


倍速链

Double plus speed chains

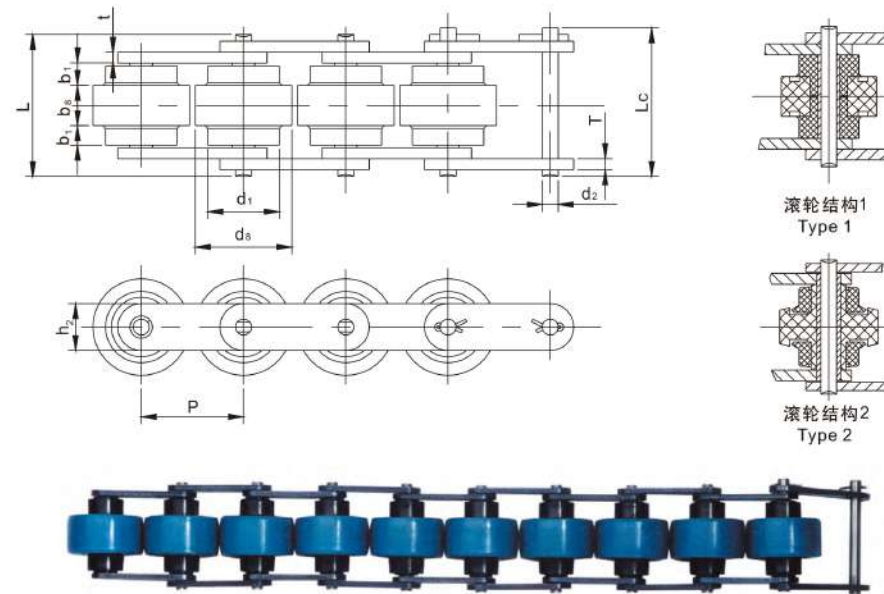


B

JB 链号 JB Chain No.	节距 Pitch	滚子尺寸 Roller dimensions					销轴尺寸 Pin dimensions			链板尺寸 Plate dimensions			每米重量 Weight per meter
		P	d ₁ max	d ₃ max	b ₁ max	b ₂ max	d ₂ max	L max	Lc max	h ₂ max	T max	t max	
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	
BS25-C206B	19.05	11.91	18.30	4.00	8.00	3.28	24.00	25.60	8.20	1.30	1.50	0.52	
BS25-C208A	25.40	15.88	24.60	5.70	10.30	3.96	31.00	32.80	11.70	1.50	1.50	0.79	
BS25-C210A	31.75	19.05	30.60	7.10	13.00	5.08	39.50	41.20	15.00	2.06	2.06	1.36	
BS25-C212A	38.10	22.23	36.60	8.50	15.50	5.94	48.80	50.50	18.00	3.25	3.25	2.19	
BS30-C206B	19.05	9.00	18.30	4.50	9.10	3.28	26.30	29.60	7.28	1.30	1.50	0.50	
BS30-C208A	25.40	11.91	24.60	6.10	12.50	3.96	35.60	39.50	9.60	1.50	2.00	0.83	
BS30-C210A	31.75	14.80	30.60	7.50	15.00	5.08	43.00	47.10	12.20	2.00	2.40	1.27	
BS30-C212A	38.10	18.0	37.00	9.75	20.00	5.94	58.10	62.70	15.00	3.00	4.00	2.14	

Double plus speed chains



Double plus speed chains


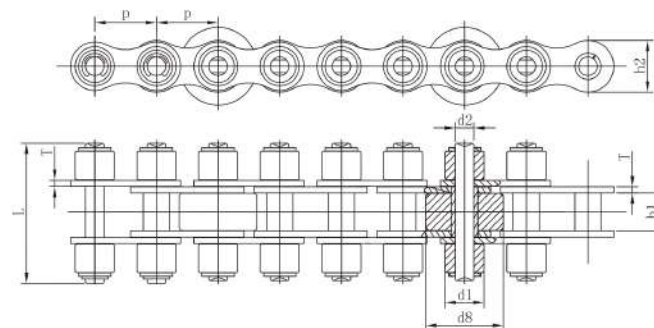


Technical drawing of a roller assembly. The top view shows a side profile with dimensions: total length l , distance from the left end to the first roller l_e , roller diameter d_2 , distance between rollers d_1 , distance from the last roller to the right end d_8 , and roller width b_1 . The bottom view shows a top-down perspective of the roller assembly with dimensions: roller diameter d_2 , distance between rollers p , and roller width h_2 .

倍速链

Double plus speed chains

B

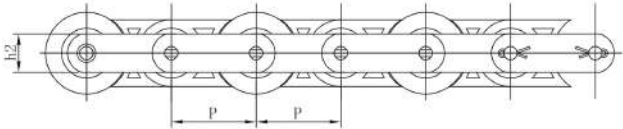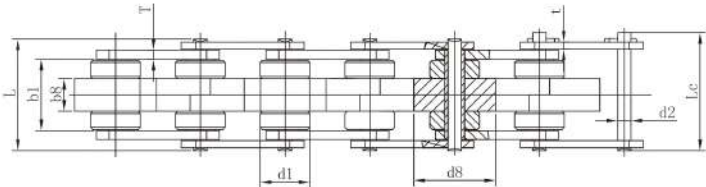

环球链号 Universal Chain No.	节距 Pitch	滚子直径 Roller diameter			内节内宽 Width between inner plates	销轴尺寸 Pin dimensions			链板尺寸 plate dimensions		抗拉强度 Ultimate tensile strength
	P	d_1 max	d_8 max	b_8 max	b_1 min	d_2 max	L max	L_c max	h_2 max	T max	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN
C2080VRPd	38.1	22	35.8	14.9	32	5.94	50.2	52.9	18.08	4/3.2	31.1