


# 橡胶链

Conveyor chains used for rubber production

B

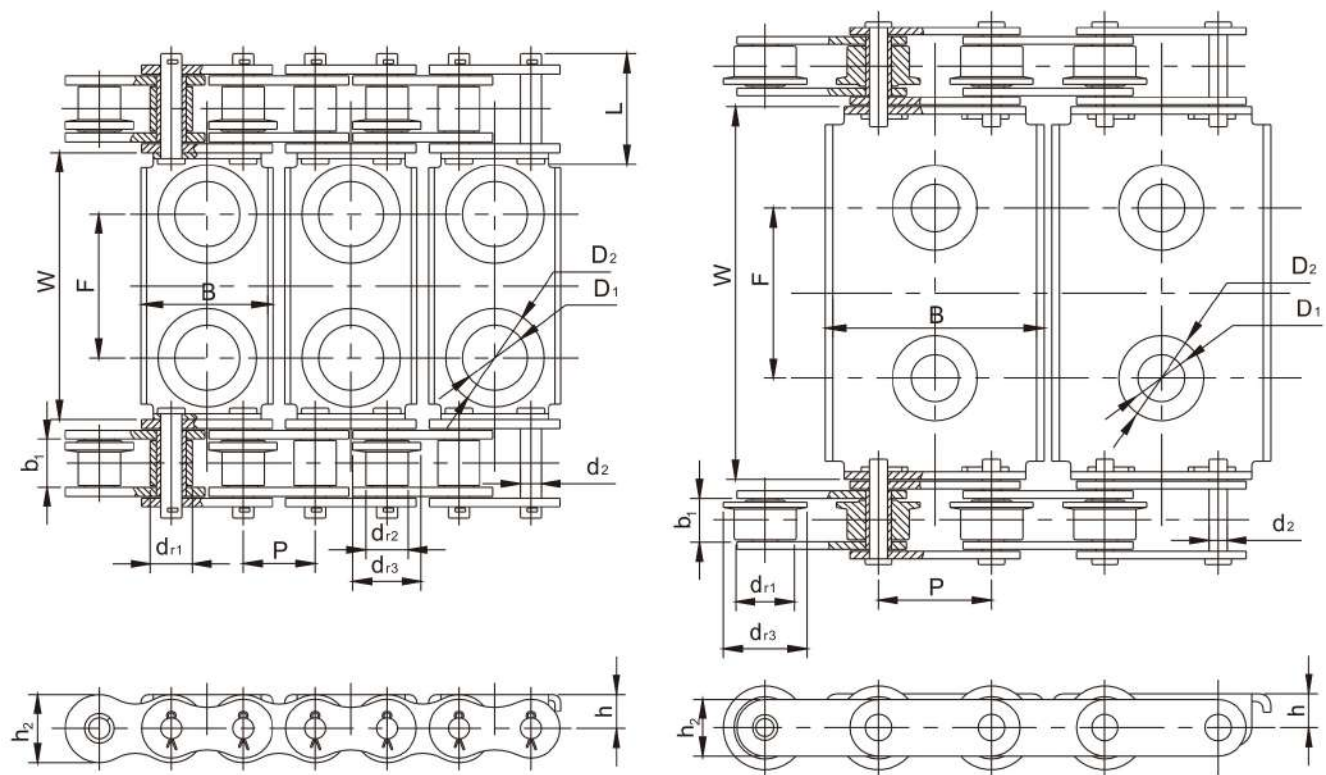

| 链号<br>Chain No. | 节距<br>Pitch | 内节内宽<br>Width between inner plates | 滚子直径<br>Roller diameter |                       |                       | 内链板高度<br>Inner plate depth | 销轴直径<br>Pin diameter  | 销轴长度<br>Pin length | 附板尺寸<br>Attachment dimension |     |                |                |    |    |
|-----------------|-------------|------------------------------------|-------------------------|-----------------------|-----------------------|----------------------------|-----------------------|--------------------|------------------------------|-----|----------------|----------------|----|----|
|                 | P           | b <sub>1</sub><br>min              | d <sub>r1</sub><br>max  | d <sub>2</sub><br>max | d <sub>3</sub><br>max | h <sub>2</sub><br>max      | d <sub>2</sub><br>max | L<br>max           | W                            | B   | D <sub>1</sub> | D <sub>2</sub> | F  | h  |
|                 | mm          | mm                                 | mm                      | mm                    | mm                    | mm                         | mm                    | mm                 | mm                           | mm  | mm             | mm             | mm | mm |
| 24ARJ           | 38.10       | 25.22                              | 22.23                   | 22.23                 | 36.20                 | 36.00                      | 11.10                 | 58.00              | 141                          | 70  | 34.50          | 52             | 76 | 18 |
| P60RJ           | 60.00       | 21.30                              | -                       | 33.00                 | 44.30                 | 30.20                      | 9.45                  | 51.00              | 197                          | 116 | 25.00          | 45             | 90 | 18 |