


# 水稻收割机链

Rice harvester chains

# 水稻收割机链


Rice harvester chains

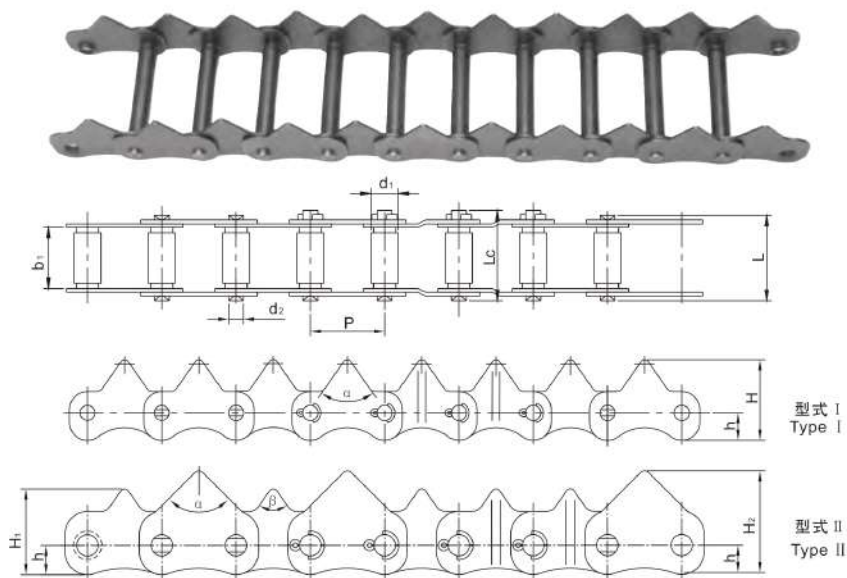

型式 I  
Type I

型式 II  
Type II

| ISO/DIN<br>链号<br>ISO/DIN<br>Chain<br>No. | 节距<br>Pitch | 滚子直径<br>Roller<br>diameter | 内节内宽<br>Width between<br>inner plates | 销轴直径<br>Pin<br>diameter | 销轴长度<br>Pin<br>length |                       | 齿形角<br>Tooth<br>angle | 链板尺寸<br>Plate<br>dimensions |                                            | 抗拉强度<br>Ultimate<br>tensile strength | 型式<br>type |
|------------------------------------------|-------------|----------------------------|---------------------------------------|-------------------------|-----------------------|-----------------------|-----------------------|-----------------------------|--------------------------------------------|--------------------------------------|------------|
|                                          | P           | d <sub>r</sub><br>max      | b <sub>i</sub><br>min                 | d <sub>p</sub><br>max   | L<br>max              | L <sub>c</sub><br>max | α                     | h                           | H                                          | Q<br>min                             |            |
|                                          | mm          | mm                         | mm                                    | mm                      | mm                    | mm                    | Angle                 | mm                          | mm                                         | kN                                   |            |
| 3318T                                    | 33          | 10.1                       | 18                                    | 7                       | 29.5                  | 32.0                  | 70°                   | 13                          | 38                                         | 19.6                                 | I          |
| 3322T                                    | 33          | 10.1                       | 22                                    | 7                       | 33.5                  | 36.0                  | 70°                   | 13                          | 38                                         | 19.6                                 | I          |
| 3325T                                    | 33          | 10.1                       | 25                                    | 7                       | 36.5                  | 39.0                  | 70°                   | 13                          | 38                                         | 19.6                                 | I          |
| 3325Ta                                   | 33          | 10.1                       | 25                                    | 7                       | 35.2                  | 37.4                  | 90°                   | 13                          | 38                                         | 19.6                                 | I          |
| 3330T1                                   | 33          | 10.1                       | 30                                    | 7                       | 41.5                  | 44.0                  | 60°                   | 13                          | 43                                         | 19.6                                 | I          |
| 3330T2                                   | 33          | 10.1                       | 30                                    | 7                       | 41.5                  | 44.0                  | 70°                   | 13                          | 38                                         | 19.6                                 | I          |
| 3330Ta                                   | 33          | 12.8                       | 30                                    | 7                       | 39.5                  | 42.5                  | 70°                   | 13                          | 38                                         | 19.6                                 | I          |
| 3358T                                    | 33          | 10.1                       | 58                                    | 7                       | 69.5                  | 72.0                  | 70°                   | 10                          | 43                                         | 19.6                                 | I          |
| 3358Ta                                   | 33          | 10.1                       | 58                                    | 7                       | 68.5                  | 70.8                  | 75°                   | 10                          | 43                                         | 19.6                                 | I          |
| 3558T                                    | 35          | 10.1                       | 58                                    | 7                       | 69.35                 | 71.65                 | 90°                   | 15                          | 48                                         | 22.5                                 | I          |
| 3358b                                    | 33          | 12.8                       | 58                                    | 9.5                     | 70.1                  | 72.8                  | α: 90°<br>β: 75°      | 13                          | H <sub>i</sub> : 38<br>H <sub>i</sub> : 46 | 19.6                                 | II         |
| 3358C/C*b                                | 33          | 12.7                       | 58                                    | 9.5                     | 70.3                  | 72.9                  | α: 90°<br>β: 70°      | 13                          | H <sub>i</sub> : 38<br>H <sub>i</sub> : 46 | 19.6                                 | II         |

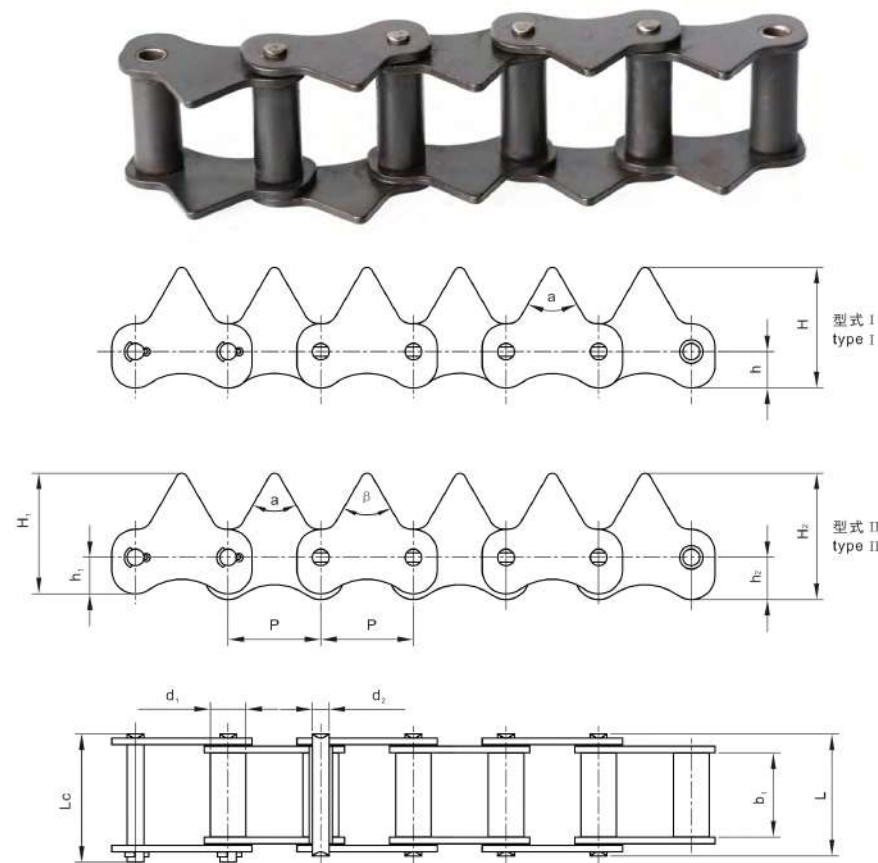

型式 I  
type I

型式 II  
type II

| ISO/DIN<br>链号<br>ISO/DIN<br>Chain<br>No. | 节距<br>Pitch | 滚子直径<br>Roller<br>diameter | 内节内宽<br>Width between<br>inner plates | 销轴直径<br>Pin<br>diameter | 销轴长度<br>Pin<br>length |                       | 齿形角<br>Tooth<br>angle | 链板尺寸<br>Plate<br>dimensions                |                                            | 抗拉强度<br>Ultimate<br>tensile strength | 型式<br>type |
|------------------------------------------|-------------|----------------------------|---------------------------------------|-------------------------|-----------------------|-----------------------|-----------------------|--------------------------------------------|--------------------------------------------|--------------------------------------|------------|
|                                          | P           | d <sub>r</sub><br>max      | b <sub>i</sub><br>min                 | d <sub>p</sub><br>max   | L<br>max              | L <sub>c</sub><br>max | α                     | h                                          | H                                          | Q<br>min                             |            |
|                                          | mm          | mm                         | mm                                    | mm                      | mm                    | mm                    | Angle                 | mm                                         | mm                                         | kN                                   |            |
| 3330                                     | 33          | 12.7                       | 30                                    | 5.94                    | 43.5                  | 45.6                  | 60°                   | h <sub>i</sub> : 13<br>h <sub>i</sub> : 15 | H <sub>i</sub> : 43<br>H <sub>i</sub> : 45 | 19.6                                 | II         |
| 3330a                                    | 33          | 12.7                       | 30                                    | 5.94                    | 43.5                  | 45.6                  | 70°                   | 13                                         | 38                                         | 19.6                                 | I          |
| 3322                                     | 33          | 12.7                       | 22                                    | 5.94                    | 35.5                  | 37.6                  | 70°                   | 15                                         | 40                                         | 19.6                                 | I          |
| 3358                                     | 33          | 12.7                       | 58                                    | 7.0                     | 70.9                  | 73.5                  | α: 90°<br>β: 75°      | 13                                         | H <sub>i</sub> : 38<br>H <sub>i</sub> : 46 | 19.6                                 | II         |