
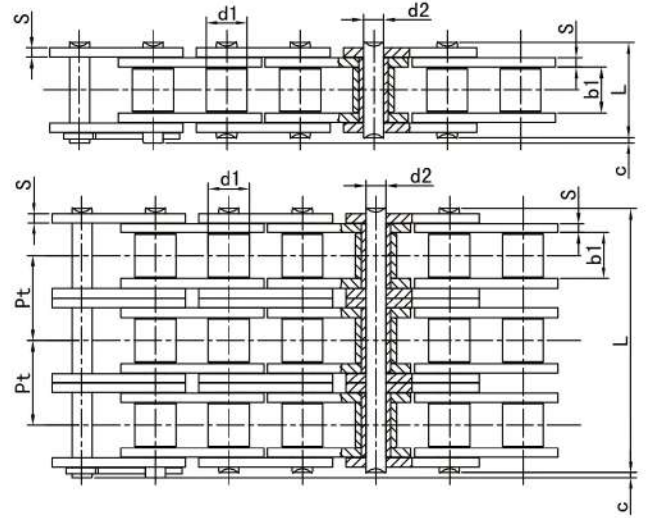


港机链

port machine chains

A

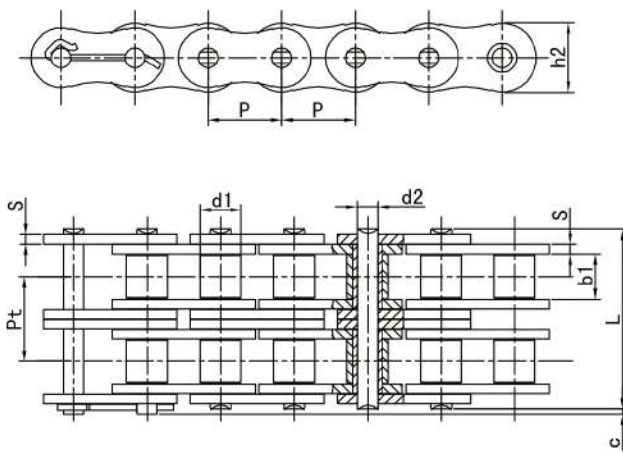

A系列短节距传动用低速重载精密滚子链（港机链）

Low Speed and Heavy duty A Series Short Pitch Precision Roller Chains for Transmission (Port Machine Chains)

链号 Chain No.	GB链号 ISO链号 GB chain no. ISO chain no.	节距 Pitch P	滚子直径 Roller diameter d ₁	内链节内宽 Inner width of inner chain link b ₁	销轴直径 Bearing pin diameter d ₂	链板厚度 Plate thickness s	链板高度 Plate height h ₂	排距 Array pitch Pt	销轴长度 Bearing pin length L	止锁件附加宽度 Additional width of lock device c	抗拉载荷 Tensile load min	每米重量 Weight/m kg/m
80Sw-1	16A-1	25.40	Φ15.80	15.75min	Φ7.90	3.18	24.13	/	32.60	3.60	70.60	2.76
80Sw-2	16A-2	25.40	Φ15.80	15.75min	Φ7.90	3.18	24.13	29.29	61.90	3.60	141.20	5.45
80Sw-3	16A-3	25.40	Φ15.80	15.75min	Φ7.90	3.18	24.13	29.29	91.20	3.60	211.80	8.15
80Sw-4	16A-4	25.40	Φ15.80	15.75min	Φ7.90	3.18	24.13	29.29	120.50	3.60	282.40	10.82
100Sw-1	20A-1	31.75	Φ19.00	18.90min	Φ9.50	3.96	30.18	/	39.60	4.00	105.90	4.15
100Sw-2	20A-2	31.75	Φ19.00	18.90min	Φ9.50	3.96	30.18	35.76	75.40	4.00	211.80	8.20
100Sw-3	20A-3	31.75	Φ19.00	18.90min	Φ9.50	3.96	30.18	35.76	111.20	4.00	317.70	12.25
100Sw-4	20A-4	31.75	Φ19.00	18.90min	Φ9.50	3.96	30.18	35.76	147.00	4.00	423.60	16.31
120Sw-1	24A-1	38.10	Φ22.20	25.23min	Φ11.10	4.75	36.20	/	49.90	4.20	150.00	6.05
120Sw-2	24A-2	38.10	Φ22.20	25.23min	Φ11.10	4.75	36.20	45.44	95.30	4.20	300.00	11.99
120Sw-3	24A-3	38.10	Φ22.20	25.23min	Φ11.10	4.75	36.20	45.44	140.80	4.20	450.00	17.93
120Sw-4	24A-4	38.10	Φ22.20	25.23min	Φ11.10	4.75	36.20	45.44	186.20	4.20	600.00	23.82
140Sw-1	28A-1	44.45	Φ25.40	25.23min	Φ12.70	5.56	42.24	/	53.70	4.70	194.20	7.99
140Sw-2	28A-2	44.45	Φ25.40	25.23min	Φ12.70	5.56	42.24	48.87	102.60	4.70	388.40	15.44
140Sw-3	28A-3	44.45	Φ25.40	25.23min	Φ12.70	5.56	42.24	48.87	151.40	4.70	582.60	23.09
140Sw-4	28A-4	44.45	Φ25.40	25.23min	Φ12.70	5.56	42.24	48.87	200.30	4.70	776.80	30.72
160Sw-1	32A-1	50.80	Φ28.50	31.55min	Φ14.20	6.35	48.26	/	63.90	5.10	247.10	10.33
160Sw-2	32A-2	50.80	Φ28.50	31.55min	Φ14.20	6.35	48.26	58.55	122.50	5.10	494.20	20.50
160Sw-3	32A-3	50.80	Φ28.50	31.55min	Φ14.20	6.35	48.26	58.55	181.00	5.10	741.30	30.67
160Sw-4	32A-4	50.80	Φ28.50	31.55min	Φ14.20	6.35	48.26	58.55	239.60	5.10	988.40	40.85

A系列加强型短节距传动用低速重载精密滚子链（港机链）

Strengthened Low Speed and High Load A Series Small Pitch Precision Roller Chains for Transmission (Port Machine Chains)

链号 Chain No.	GB链号 ISO链号 GB chain no. ISO chain no.	节距 Pitch P	滚子直径 Roller diameter d ₁	内链节内宽 Inner width of inner chain link b ₁	销轴直径 Bearing pin diameter d ₂	链板厚度 Plate thickness s	链板高度 Plate height h ₂	排距 Array pitch Pt	销轴长度 Bearing pin length L	止锁件附加宽度 Additional width of lock device c	抗拉载荷 Tensile load min	每米重量 Weight/m kg/m
80HSw-1	16AH-1	25.40	15.87	15.75	7.94	3.96	24.13	/	35.90	3.60	82.10	3.20
80HSw-2	16AH-2	25.40	15.87	15.75	7.94	3.96	24.13	/	68.40	3.60	164.20	6.34
100HSw-1	20AH-1	31.75	19.05	18.90	9.54	4.75	30.18	/	42.90	4.00	119.20	4.71
100HSw-2	20AH-2	31.75	19.05	18.90	9.54	4.75	30.18	/	82.00	4.00	238.40	9.33
120HSw-1	24AH-1	38.10	22.22	25.23	11.11	5.56	36.20	/	53.30	4.20	163.30	6.72
120HSw-2	24AH-2	38.10	22.22	25.23	11.11	5.56	36.20	/	102.20	4.20	326.60	13.35
200HSw-1	40AH-1	63.50	39.67	37.85	22.00	9.52	60.33	/	84.60	6.60	440.00	20.00
200HSw-2	40AH-2	63.50	39.67	37.85	22.00	9.52	60.33	/	162.90	6.60	880.00	39.20
200HSw-3	40AH-3	63.50	39.67	37.85	22.00	9.52	60.33	/	241.20	6.60	1320.00	58.50