


直板型糖机链

Sugar chains with straight plate

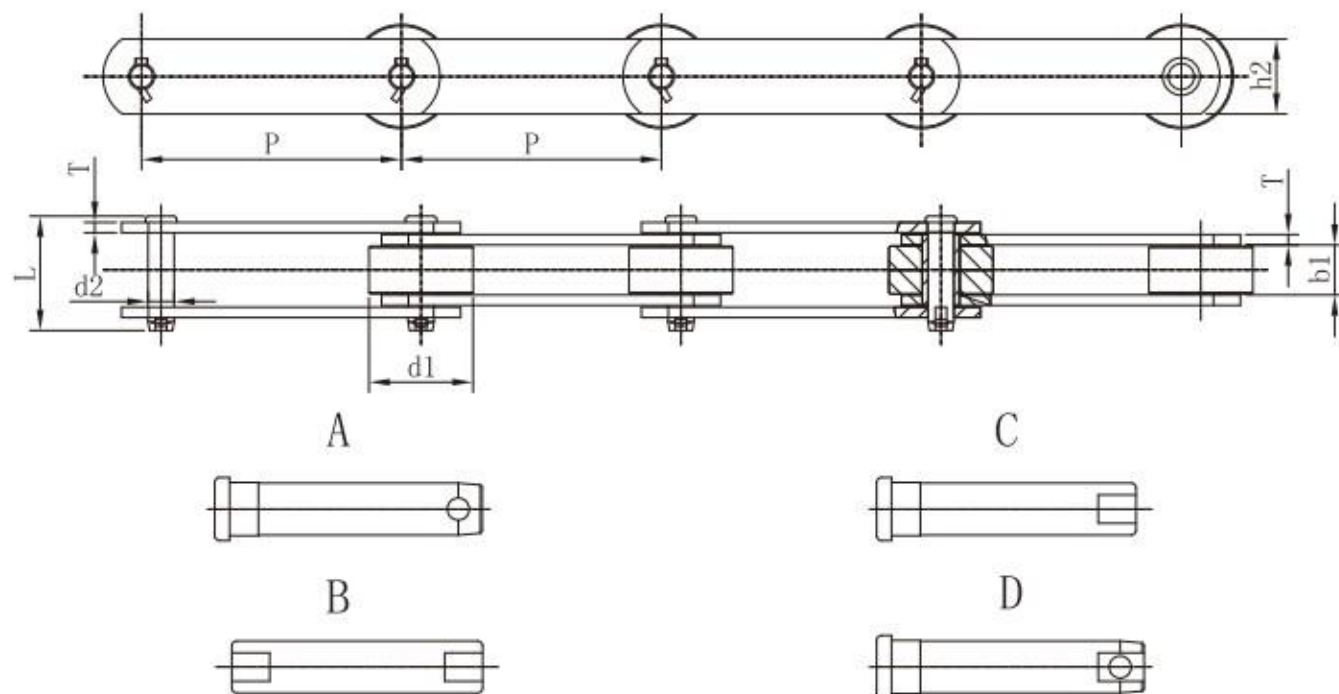


环球链号 Universal Chain No.	节距 Pitch	内节内宽 Width between inner plates	滚子直径 Roller diameter	销轴 Pin			链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Ultimate tensile strength	每米重量 Weight per meter
	P	b1 max	d ₁ max	d ₂ max	L max	Type	h ₂ max	T	Q min	q =
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
09040	101.6	29.3	50.8	17.46	78.5	A	44.5	8	178.4	13.16
09041	101.6	31.8	57.15	15.88	72.8	B/C	38.1	6.4	72.3	11.67
09050	127	38.4	69.85	19	96.5	B/C	50.8	9.6	180	19.22
09060	152.4	37.7	69.85	18.9	94.3	A/D	50.8	9.5	250	17.2
09061	152.4	37.7	69.85	18.9	95.2	A	57.2	9.5	377.9	18.74
09062	152.4	37.8	69.85 76.2 73	22.23	97.1	D	57.2	9.5	444.5	18.5 19.5 19.2
09063	152.4	38	76.2	23.83	102	A	60.3	10.3	622.3	21.88
09064	152.4	38	76.2	23.83	102	D	61.9	10.3	635	22.2


糖机链附件

Sugar chains attachments


B

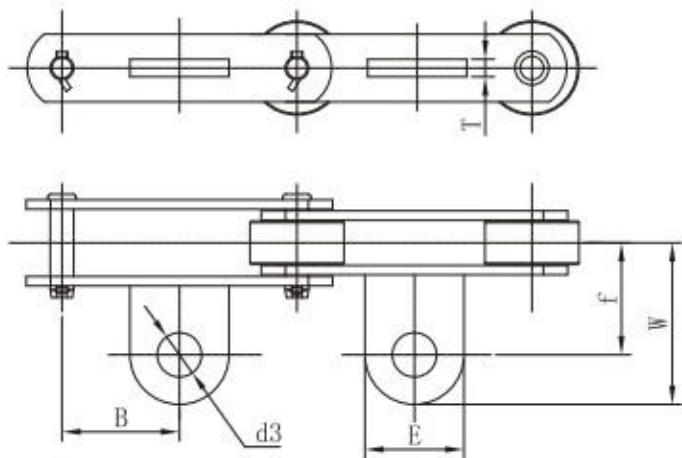

环球链号 Universal Chain No.	B	f	W	E	d3	T
	mm	mm	mm	mm	mm	mm
09060	76.2	67	87.4	45	21	15
09061	76.2	67	87.4	45	21	15
09062	76.2	67	87.4	45	21	15

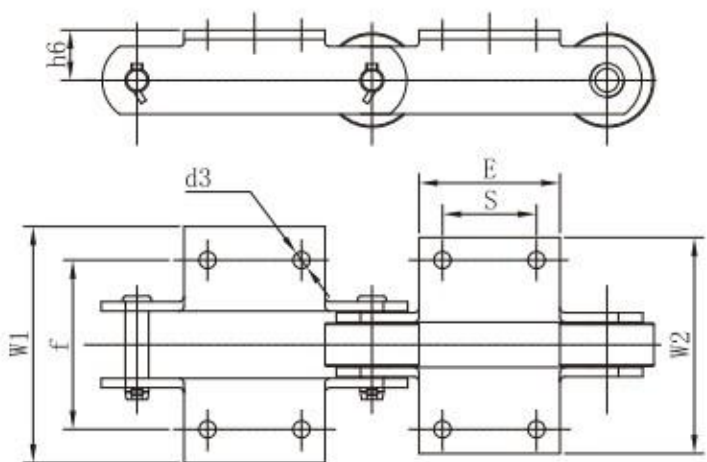

环球链号 Universal Chain No.	h6	S	E	d3	f	W1	W2
	mm	mm	mm	mm	mm	mm	mm
09060	41.3	76.2	114.3	13	111.1	171.5	151.1
09061	41.3	76.2	114.3	13	111.1	165.1	144.7
09062	41.3	76.2	114.3	11.1/13/14	111.1	165.1	144.7
09063	44.5	76.2	114.3	14.3/12.7	111.1	165.1	143.1

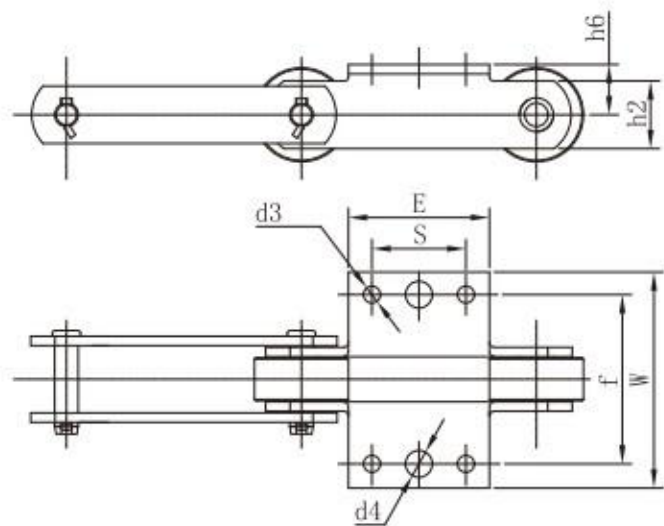

环球链号 Universal Chain No.	h6	S	E	d3	d4	f	W	h2
	mm	mm	mm	mm	mm	mm	mm	mm
09041	36	50.8	82.6	10.3	15	101.6	133.6	44.4
09050	39.6	50.8	82.6	10.3	13.5	103.4	139.4	50.8