


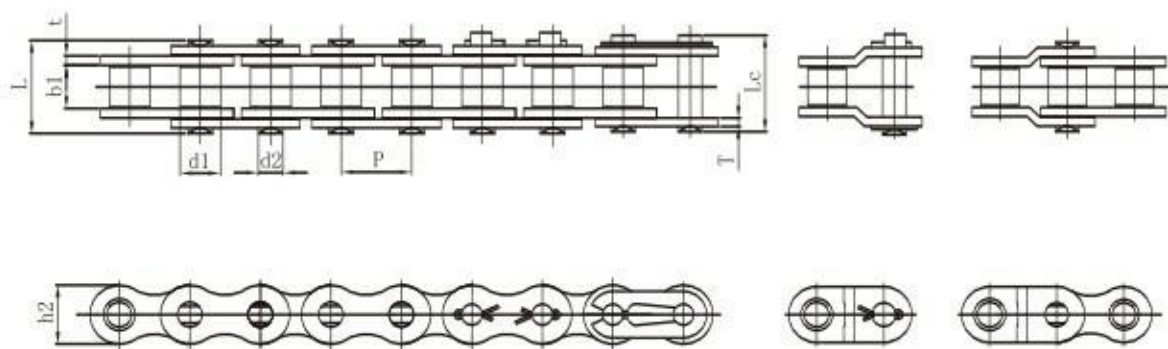

ISO/DIN 链号 ISO/DIN	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	抗拉强度 Ultimate tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
Chain No.	P	d ₁ max min	b ₁ min max	d ₂ max min	L max min	L _c max min	h ₂ max min	t/T	Pt	Q (ISO/DIN) min kN	Q ₀ kN	q kg/m
05B-1	8.00	5.00	3.00	2.31	8.20	8.90	7.10	0.80	-	4.40/5.00	5.90	0.20
* 06B-1	9.525	6.35	5.72	3.28	13.15	15.15	8.26	1.34	-	8.90/9.00	10.30	0.41
08B-1	12.70	8.51	7.75	4.45	16.95	19.05	11.81	1.60	-	17.80/18.00	19.60	0.69
10B-1	15.875	10.16	9.65	5.08	19.50	22.0	14.73	1.70	-	22.20/22.40	27.50	0.93
12B-1	19.05	12.07	11.68	5.72	22.50	25.10	16.13	1.85	-	28.90/29.00	33.30	1.15
16B-1	25.40	15.88	17.02	8.28	36.10	41.50	21.08	4.09/3.10	-	60.00	71.00	2.71
20B-1	31.75	19.05	19.58	10.19	42.40	47.60	26.42	4.60/3.60	-	95.00	101.80	3.70
24B-1	38.10	25.40	25.40	14.63	53.40	57.10	33.40	5.80/4.80	-	160.00	176.00	7.10
28B-1	44.45	27.94	30.99	15.90	65.10	69.40	37.08	7.50/6.50	-	200.00	215.80	8.50
32B-1	50.80	29.21	30.99	17.81	66.00	69.50	42.29	7.00/6.00	-	250.00	280.30	10.25
40B-1	63.50	39.37	38.10	22.89	82.60	91.30	52.96	8.50/7.50	-	355.00	392.00	16.35
48B-1	76.20	48.26	45.72	29.24	99.10	109.60	63.88	11.70/10.00	-	560.00	599.20	25.00
56B-1	88.90	53.98	53.34	34.32	114.6	123.0	77.80	13.5/12.0	-	850.0	940.0	35.78
64B-1	101.60	63.50	60.96	39.40	130.0	138.5	90.17	15.0/13.0	-	1120.0	1240.0	46.00
72B-1	114.30	72.39	68.58	44.48	147.4	156.4	103.60	17.0/15.0	-	1400.0	1550.0	60.80

*直链板
*Straight side plates

B系列短节距精密滚子链


Short pitch precision roller chains (B series)

双排
Duplex chains

叁排
Triplex chains


B系列短节距精密滚子链

Short pitch precision roller chains (B series)

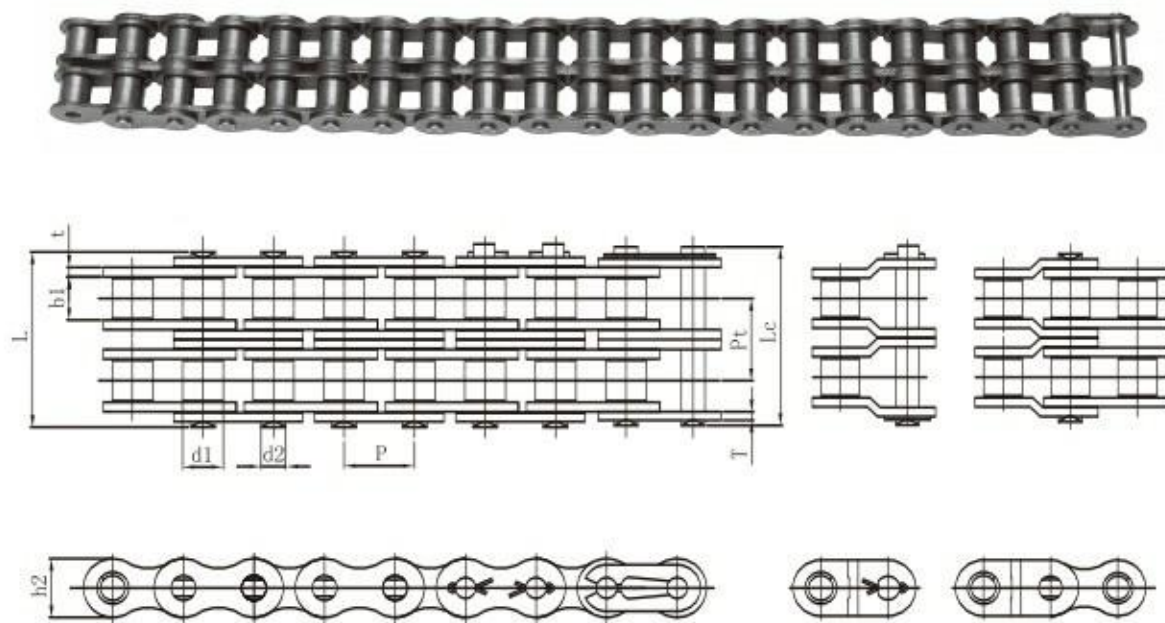

ISO/DIN 链号 ISO/DIN Chain No.	节距 Pitch P	滚子直径 Roller diameter d ₁	内节内宽 Width between inner plates b ₁	销轴直径 Pin diameter d ₂	销轴长度 Pin length L, Lc	内链板高度 Inner plate depth h ₂	链板厚度 Plate thickness t/T	排距 Transverse pitch Pt	抗拉强度 Ultimate tensile strength Q (ISO/DIN)	平均抗拉强度 Average tensile strength Q ₀	每米重量 Weight per meter q
05B-2	8.00	5.00	3.00	2.31	13.90 14.50	7.10	0.80	5.64	7.80	10.20	0.33
*06B-2	9.525	6.35	5.72	3.28	23.40 27.10	8.26	1.34	10.24	16.90	18.10	0.74
08B-2	12.70	8.51	7.75	4.45	31.00 33.00	11.81	1.60	13.92	31.10/32.00	37.40	1.34
10B-2	15.875	10.16	9.65	5.08	36.10 38.60	14.73	1.70	16.59	44.50	54.20	1.84
12B-2	19.05	12.07	11.68	5.72	42.00 44.40	16.13	1.85	19.46	57.80	66.60	2.31
16B-2	25.40	15.88	17.02	8.28	68.00 73.40	21.08	4.09/3.10	31.88	106.00	126.50	5.42
20B-2	31.75	19.05	19.58	10.19	79.70 83.60	26.42	4.60/3.60	36.45	170.00	210.00	7.20
24B-2	38.10	25.40	25.40	14.63	101.80 105.42	33.40	5.80/4.80	48.36	280.00	305.50	13.40
28B-2	44.45	27.94	30.99	15.90	124.70 128.96	37.08	7.50/6.50	59.56	360.00	390.50	16.60
32B-2	50.80	29.21	30.99	17.81	124.80 128.05	42.29	7.00/6.00	58.55	450.00	487.50	21.00
40B-2	63.50	39.37	38.10	22.89	154.50 163.80	52.96	8.50/7.50	72.29	630.00	680.20	32.00
48B-2	76.20	48.26	45.72	29.24	190.40 200.90	63.88	11.70/10.00	91.21	1000.00	1070.00	50.00
56B-2	88.90	53.98	53.34	34.32	221.2 229.6	77.80	13.5/12.0	106.6	1600.00	1760.00	71.48
64B-2	101.60	63.50	60.96	39.40	249.9 258.4	90.17	15.0/13.0	119.89	2000.00	2200.00	91.00
72B-2	114.30	72.39	68.58	44.48	283.7 292.7	103.80	17.0/15.0	136.27	2500.00	2750.00	120.40

*直链板
*Straight side plates

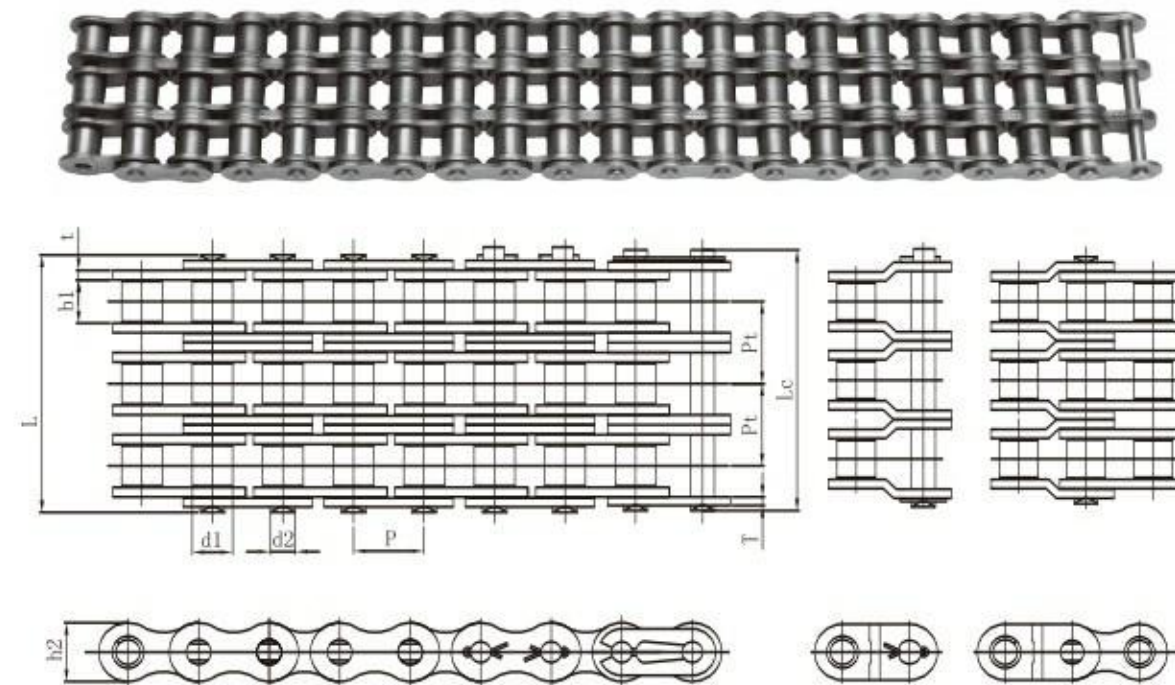

ISO/DIN 链号 ISO/DIN Chain No.	节距 Pitch P	滚子直径 Roller diameter d ₁	内节内宽 Width between inner plates b ₁	销轴直径 Pin diameter d ₂	销轴长度 Pin length L, Lc	内链板高度 Inner plate depth h ₂	链板厚度 Plate thickness t/T	排距 Transverse pitch Pt	抗拉强度 Ultimate tensile strength Q (ISO/DIN)	平均抗拉强度 Average tensile strength Q ₀	每米重量 Weight per meter q
*06B-3	9.525	6.35	5.72	3.28	33.50 37.30	8.26	1.34	10.24	24.90	29.80	1.16
08B-3	12.70	8.51	7.75	4.45	44.90 47.20	11.81	1.60	13.92	44.50/47.50	50.20	2.03
10B-3	15.875	10.16	9.65	5.08	52.70 55.60	14.73	1.70	16.59	66.70	79.80	2.77
12B-3	19.05	12.07	11.68	5.72	61.50 65.20	16.13	1.85	19.46	86.70	101.80	3.46
16B-3	25.40	15.88	17.02	8.28	99.80 105.30	21.08	4.09/3.10	31.88	160.00	190.00	8.13
20B-3	31.75	19.05	19.58	10.19	114.55 121.20	26.42	4.60/3.60	36.45	250.00	276.20	10.82
24B-3	38.10	25.40	25.40	14.63	150.20 153.82	33.40	5.80/4.80	48.36	425.00	480.00	20.10
28B-3	44.45	27.94	30.99	15.90	184.30 188.52	37.08	7.50/6.50	59.56	530.00	580.00	24.92
32B-3	50.80	29.21	30.99	17.81	184.01 186.60	42.29	7.00/6.00	58.55	670.00	720.20	31.56
40B-3	63.50	39.37	38.10	22.89	226.80 236.10	52.96	8.50/7.50	72.29	950.00	1020.00	48.10
48B-3	76.20	48.26	45.72	29.24	281.60 292.10	63.88	11.70/10.00	91.21	1500.00	1590.00	75.00
56B-3	88.90	53.98	53.34	34.32	327.8 336.20	77.80	13.5/12.0	106.6	2240.00	2240.00	107.18
64B-3	101.60	63.50	60.96	39.40	369.8 378.30	90.17	15.0/13.0	119.89	3000.00	3300.00	136.00
72B-3	114.30	72.39	68.58	44.48	420.0 429.00	103.80	17.0/15.0	136.27	3750.00	4125.00	180.00

*直链板
*Straight side plates