


空心销轴双向滚子链

Hollow pin chains with double direction roller

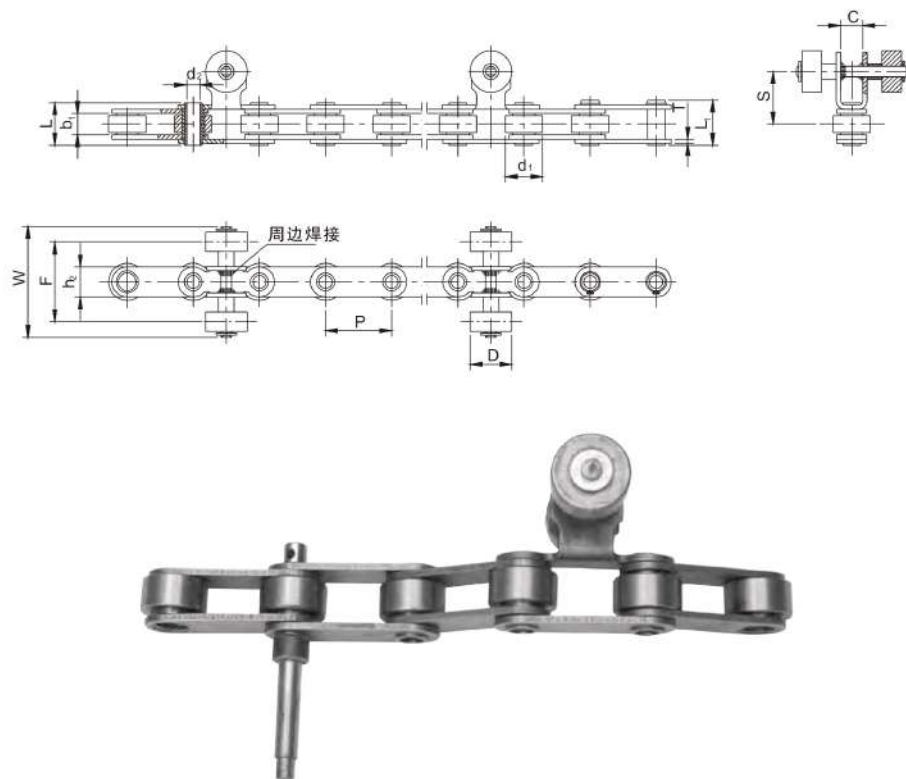


节距 Pitch	内节内宽 Width between inner plates	滚子直径 Roller diameter	链板高度 Inner plate depth	链板厚度 Plate thickness	空心销轴尺寸 Hollow pin dimension			附件尺寸 Attachment dimension					抗拉强度 Ultimate tensile strength
P	b ₁ min	d ₁ max	h ₂ max	T	d ₂ min	L max	L ₁ max	C	S	D	F	W max	Q min
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN
50.80	15.80	28.58	23.20	3.26	10.10	32.60	34.30	17.00	40.30	32.00	62.50	85.00	38.50


空心销轴链

Hollow pin conveyor chains

I型 type I

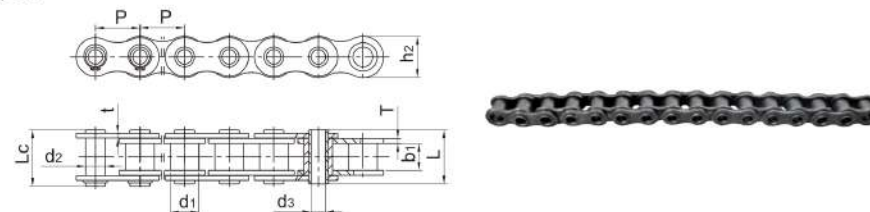

II型 type II

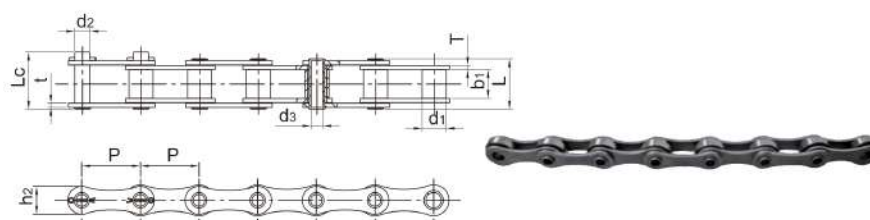


环球链号 Universal Chain No.	节 距 Pitch	内节内宽 Width between inner plates				销轴尺寸参数 Pin dimension				链板厚度 Plate thickness	内链板高度 Inner plate depth	抗拉强度 Ultimate tensile strength	型 号 Type	
		套筒直径 Bush diameter												
		P	d1 max	b1 min	d2 max	d3 min	A	B	L (A+A)	Lc (A+B)	I/T	h2 max		Q min
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		KN
40HP	12.70	7.95	7.95	5.68	4.00	8.10	9.40	16.2	17.5	1.50	11.70	13.2	I	
50HP	15.875	10.16	9.53	7.24	5.12	10.3	11.7	20.6	22.0	2.00	14.60	20.6	I	
60HP	19.05	11.91	12.70	8.37	5.99	12.90	14.3	25.8	27.2	2.40	17.50	31.4	I	
80HP	25.40	15.88	15.88	11.24	8.02	16.30	17.80	32.6	34.1	3.20	23.00	53.0	I	
*061HRNP	12.70	7.75	3.30	5.54	3.55	5.10	6.10	10.2	11.2	1.10	10.5	10.0	I	
128HP	19.05	12.07	11.68	8.09	6.00	11.35	12.55	22.7	23.9	1.90	16.0	14.0	I	
#P38.1HB	38.10	20.00	8.00	11.0	8.00	9.75	10.35	19.5	20.1	2.00	17.0	28.0	II	
#P50.8HB	50.80	30.00	11.00	12.0	8.11	13.50	14.35	27.0	27.85	3.00	26.0	50.0	II	

* 镍磷滚子链：表中套筒直径 d1 为滚子直径
Nickel-plated Roller chains: d1 in the table indicate the external diameter of the roller
滚子链：表中套筒直径 d1 为滚子直径
Roller chains: d1 in the table indicate the external diameter of the roller


空心销轴链

Hollow pin conveyor chains

I型 type I

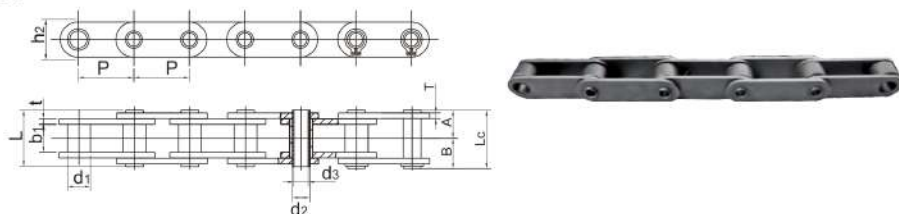

II型 type II

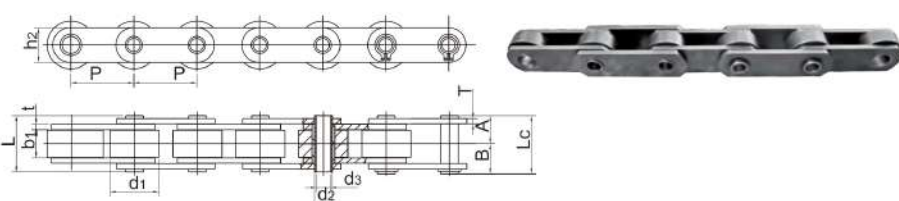


环球链号 Universal Chain No.	节距 Pitch	内节内宽 Width between inner plates				销轴尺寸参数 Pin dimension				链板厚度 Plate thickness	内链板高度 Inner plate depth	抗拉强度 Ultimate tensile strength	型号 Type
	P	d1 max	b1 min	d2 max	d3 min	A	B	L (A+B)	Lc (A+B)	t/T	h2 max	Q min	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	
C2040HP	25.40	7.95	7.95	5.68	4.00	8.10	9.40	16.2	17.5	1.5	11.70	13.2	I
#C2042HP		15.88											II
C2050HP	31.75	10.16	9.53	7.24	5.12	10.3	11.7	20.6	22.0	2.0	14.60	20.6	I
#C2052HP		19.05											II
C2060HP	38.10	11.91	12.70	8.37	5.99	12.90	14.3	25.8	27.2	2.4	17.50	31.4	I
#C2062HP		22.23											II
C2080HP	50.80	15.88	15.88	11.24	8.02	16.30	17.80	32.6	34.1	3.2	23.00	53.0	I
#C2082HP		28.58											II
#P76.2HB	76.20	47.60	16.50	18.30	12.41	24.45	25.65	48.9	50.1	5.0	40.0	132.0	II
#P101.6HB	101.6	66.70	26.00	25.00	20.31	31.50	32.90	63.0	64.4	8.0/6.0	50.0	150.0	II
#P101.6HBA	101.6	66.70	30.70	32.00	20.70	43.60	45.00	87.2	88.6	12.7/10.0	60.0	500.0	II

#滚子链：表中套筒直径 d1 为滚子直径
Roller chains: d1 in the table indicate the external diameter of the roller


空心销轴链

Hollow pin conveyor chains

A型 type A

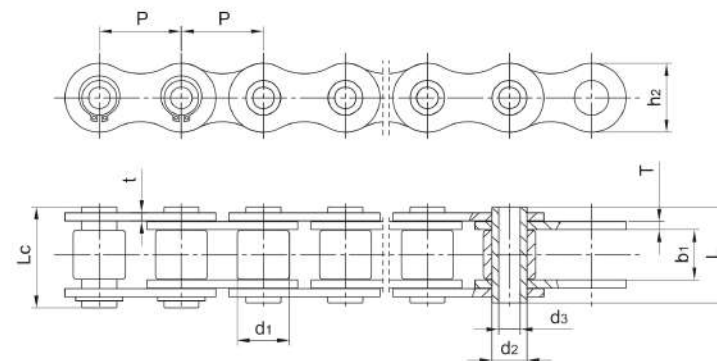

B型 type B

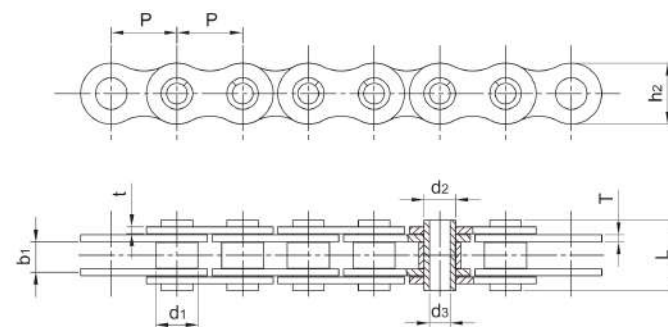

环球链号 Universal Chain No.	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter		销轴长度 Pin Length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Ultimate tensile strength	型号 Type
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max	t/T	Q min	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	
10BHR	15.875	10.16	6.5	7.6	5.0	17.0	—	14.72	1.7	15	B
12BHR	19.05	12.07	11.68	8.03	5.41	22.5	23.8	15.8	1.9	25	A
12BHRa			11.70		5.0						

#滚子链：表中套筒直径 d1 为滚子直径
Roller chains: d1 in the table indicate the external diameter of the roller


空心销轴链

Hollow pin conveyor chains


空心销轴链

Hollow pin conveyor chains

A型
type A

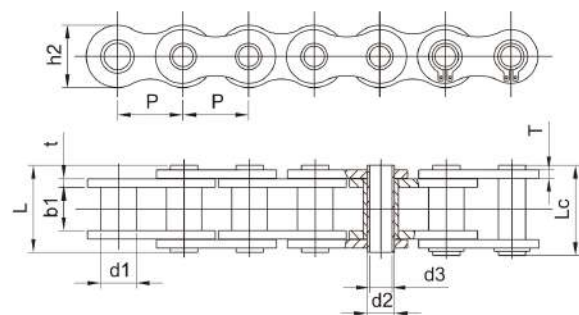


B型
type B

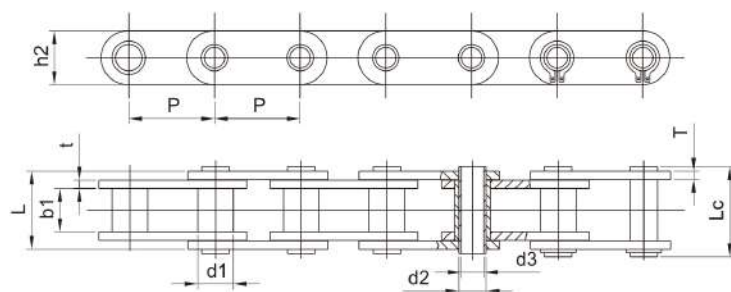


环球链号 Universal Chain No.	节距 Pitch	套筒直径 Bush diameter	内节内宽 Width Between Inner Plates	销轴直径		销轴长度		内链板高度	链板厚度	抗拉强度	型号 Type
				Pin diameter		Pin Length		Inner plate depth	Plate thickness	Ultimate tensile strength	
				d2	d3	L	Lc	h2	t/T	Q	
				max	min	max	max	max		min	
	P	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max	t/T	Q min	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	
08BHFb	12.70	8.51	9.5	6.55	5.0	18.15	—	11.81	1.6	11.1	A
P40HP	40	18.0	22.0	12.0	8.0	47.2	48.8	35.0	5.0	59	B
C60HP	19.05	11.91	12.61	8.33	6.0	25.8	27.5	18.08	2.4	26.9	B
80HPc	25.4	15.88	15.75	11.4	8.4	32.6	33.8	24.0	3.2	45	A

#滚子链：表中套筒直径d1为滚子直径
Roller chains: d1 in the table indicate the external diameter of the roller

A型
type A

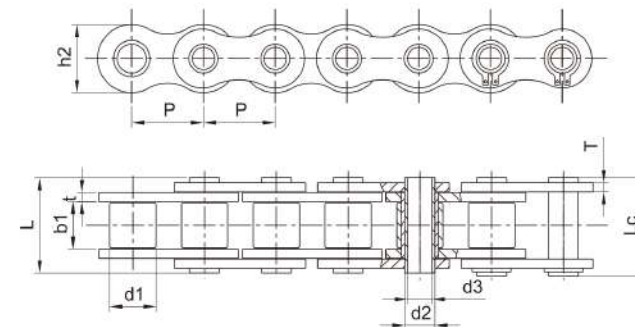

B型
type B

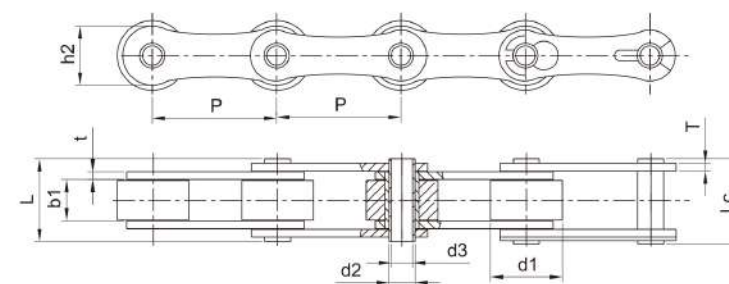

环球链号 Universal Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width Between Inner Plates	销轴直径 Pin diameter		销轴长度 Pin Length		内链板高度 Inner plate depth	链板厚度 Plate thickness	抗拉强度 Ultimate tensile strength	型号 Type
	P	d1	b1	d2	d3	L	Lc	h2	t/T	Q	
	max	min	max	min	max	max	max	max	min		
	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN	
10BHB	15.875	10.16	9.85	5.94	4.10	19.4	20.5	14.72	1.7	17	A
C2052HB	31.75	19.05	9.53	7.24	5.13	20.6	22.1	14.73	2.0	17.92	A
P40HB	40.0	26.0	10.0	11.4	8.20	27.0	29.0	24.0	3.0	32	A
P50HB	50.0	20.0	14.0	9.0	6.2	28.5	30.3	20.0	2.5	20.42	A
P50.8HBa	50.8	30.0	10.0	11.7	8.10	26.6	27.8	26.0	3.0	60	B
P50.8HBb				11.4	8.20						
P63HB	63.0	30.0	10.0	11.7	8.10	26.6	27.8	26.0	3.0	50	