



FV型输送链
Conveyor chains (FV series)

1) 单排链


无滚子型
Without roller type

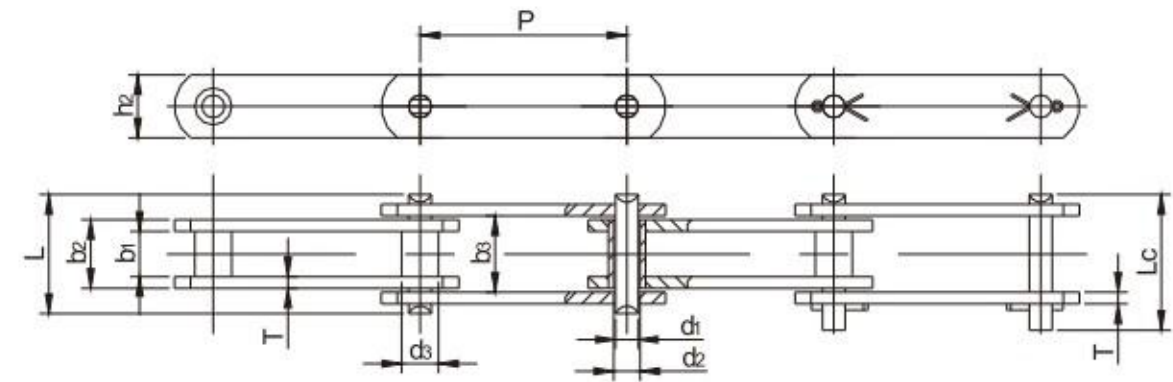


带有A型小滚子型
With A small roller type

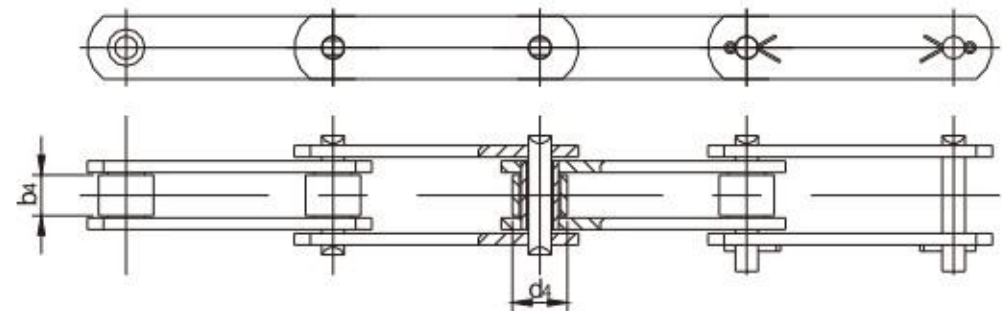

带有B和C型大滚子
With B&C large roller type

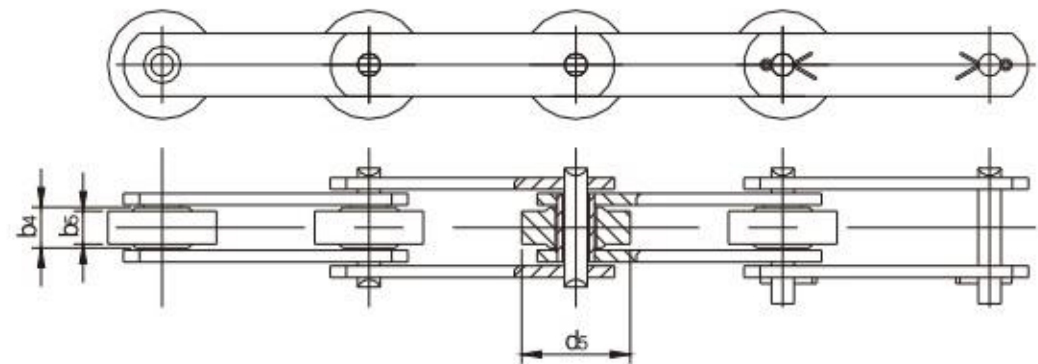

带有D和E型带边滚子
With D&E flange roller type

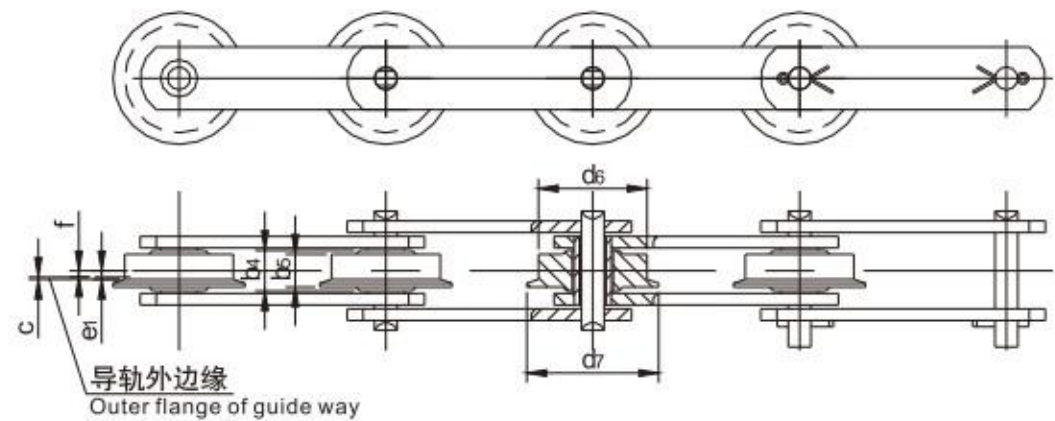

FV型输送链
Conveyor chains (FV series)

表1 (chart 1)

ISO 链号 ISO Chain No.	节 距 pitch P	尺 寸 参 数 表 Dimension chart									
		b ₁ min	b ₂ max	b ₃ min	b ₄ max	b ₅ max	b ₆ max	d ₁ max	d ₂ min	d ₃ max	d ₄ max
FV40	40 · 63 · 100	18	24.5	25	17	16	22	10	10.1	15	20
FV63	63 · 100 · 125 · 160	22	30.5	31	21	20	27.5	12	12.1	18	26
FV90	63 · 100 · 125	25	35.5	36	24	23	31	14	14.1	20	30
	160 · 200 · 250										
FV112	100 · 125 · 160 · 200 · 250	30	42.5	43	29	28	36	16	16.1	22	32
FV140	100 · 125 · 160	35	47.5	48	34	32	40	18	18.1	26	36
	200 · 250 · 315										
FV180	125 · 160 · 200	45	61.5	62.5	44	42	50	20	20.2	30	42
	250 · 315 · 400										
FV250	125 · 160 · 200	55	72	73	54	50	57	26	26.2	36	50
	250 · 315 · 400										
FV315	160 · 200 · 250 · 315 · 400	65	86	87	64	60	66.5	30	30.2	42	60
FV400	160 · 200 · 250 · 315 · 400	70	96	97	68	64	75.5	32	32.2	44	60
FV500	160 · 200 · 250	80	106	107	78	72	80.5	36	36.2	50	70
	315 · 400 · 500										
FV630	200 · 250 · 315 · 400 · 500	90	116	117	88	80	86.5	42	42.2	56	80

续表1 (continue chart 1)

ISO链号 ISO Chain No.	尺寸参数表 Dimension chart										支 承 面 积 Bearing area S cm ² (每 排)	抗 拉 强 度 Ultimate tensile strength Q(min) (/kN)	
	d ₅ max	d ₆ max	d ₇ max	d ₈ max	e ₁ =c+f		h ₂	L _c max	L max	T		Q(min) (/kN)	
					c	f						单 排	双 排
FV40	32	40	48	15	1	3	26	44	37	3	2.5	40	80
FV63	40	50	60	18	1.5	3.5	30	55	46	4	3.7	63	126
FV90	48	63	73	20	2	4.5	35	62	53	5	5	90	180
FV112	55	72	87	22	2.5	5	40	72	63	6	6.8	112	224
FV140	60	80	95	26	3	6	45	80	68	6	8.6	140	280
FV180	70	100	120	30	3	10	50	100	86	8	12.3	180	360
FV250	80	125	145	36	3.5	11.5	60	114	98	8	18.7	250	500
FV315	90	140	170	42	3.5	14.5	70	133	117	10	25.8	315	630
FV400	100	150	185	44	3.5	16.5	70	151	131	12	30.7	400	800
FV500	110	160	195	50	3.5	17.5	80	161	141	12	38.2	500	1000
FV630	120	170	210	56	4.5	17.5	100	173	153	12	48.7	630	1260

FV型输送链

Conveyor chains (FV series)

2) 双排链

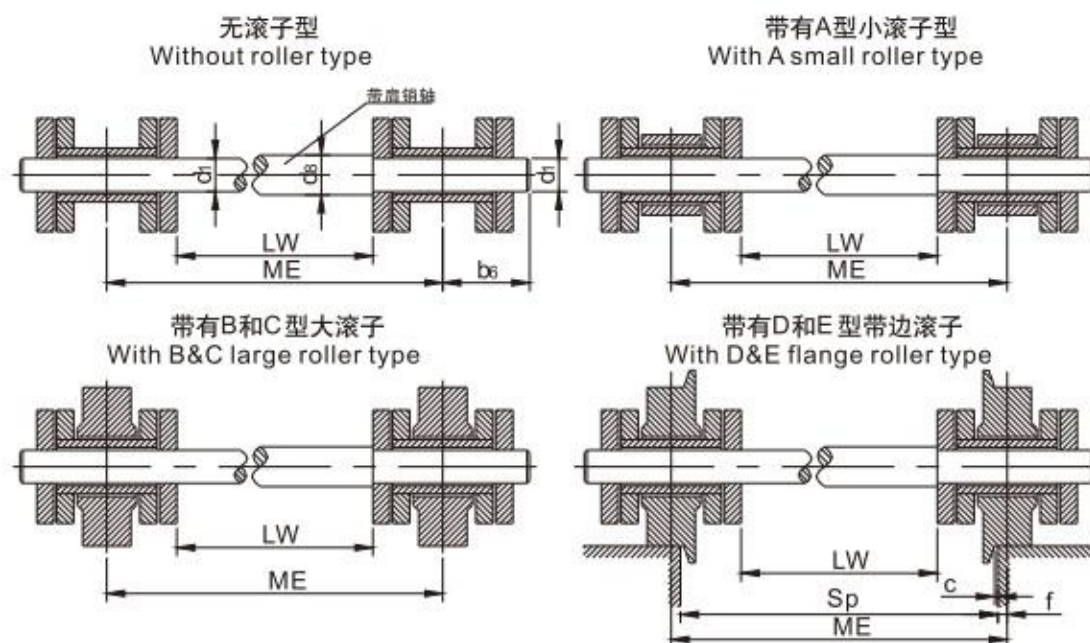


表2 (chart 2)

ISO 链号 ISO Chain No.	轨 距 Gauge Pitch												
	Sp	250	315	400	500	630	800	1000	1250	1400	1600	1800	2000
FV40	ME	256	321	406	506	636	-	-	-	-	-	-	-
	LW	225	290	375	475	605	-	-	-	-	-	-	-
FV63	ME	257	322	407	507	637	807	-	-	-	-	-	-
	LW	218	283	368	468	598	768	-	-	-	-	-	-
FV90	ME	259	324	409	509	639	809	1009	-	-	-	-	-
	LW	213	278	363	463	593	763	963	-	-	-	-	-
FV112	ME	260	325	410	510	640	810	1010	1260	-	-	-	-
	LW	205	270	355	455	585	755	955	1205	-	-	-	-
FV140	ME	262	327	412	512	642	812	1012	1262	-	-	-	-
	LW	202	267	352	452	582	752	952	1202	-	-	-	-
FV180	ME	270	335	420	520	650	820	1020	1270	1420	1620	1820	2020
	LW	191.5	256.5	341.5	441.5	571.5	741.5	941.5	1191.5	1341.5	1541.5	1741.5	1941.5
FV250	ME	273	338	423	523	653	823	1023	1273	1423	1623	1823	2023
	LW	184	249	334	434	564	734	934	1184	1334	1534	1734	1934
FV315	ME	279	344	429	529	659	829	1029	1279	1429	1629	1829	2029
	LW	172	237	322	422	552	722	922	1172	1322	1522	1722	1922
FV400	ME	-	348	433	533	663	833	1033	1283	1433	1633	1833	2033
	LW	-	227	312	412	542	712	912	1162	1312	1512	1712	1912
FV500	ME	-	350	435	535	665	835	1035	1285	1435	1635	1835	2035
	LW	-	219	304	404	534	704	904	1154	1304	1504	1704	1904
FV630	ME	-	-	435	535	665	835	1035	1285	1435	1635	1835	2035
	LW	-	-	294	394	524	694	894	1144	1294	1494	1694	1894